
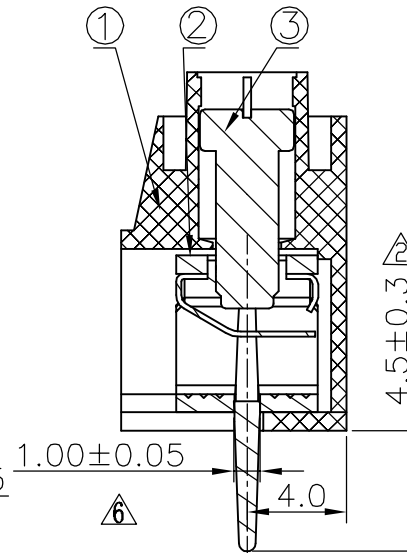
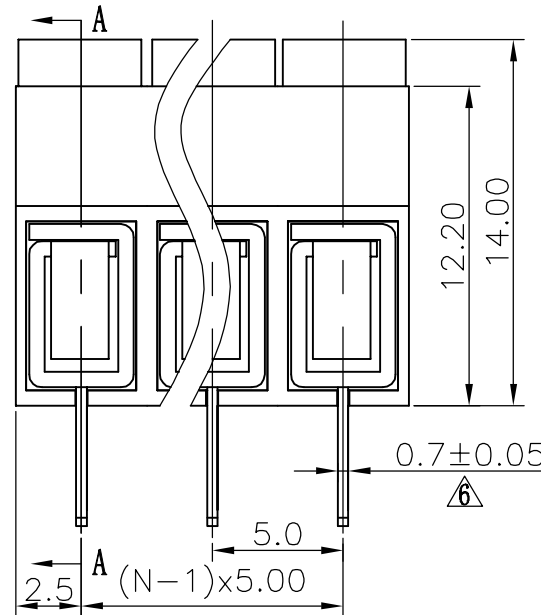
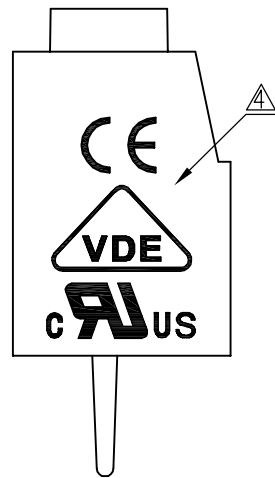


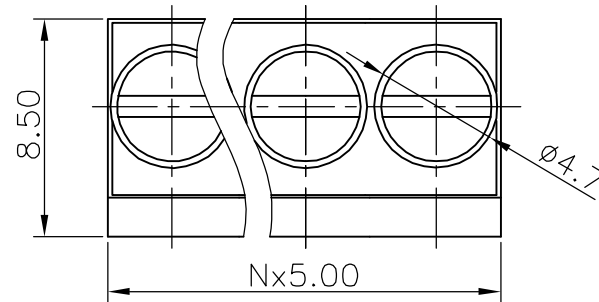


SECTION A-A

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	05/29/06
△		增加UL刻字	CSX	06/19/07
△		增加VDE、CE刻字	CSX	10/27/07
△		更换公差表	LJH	12/15/07
△		图面更新	LJH	05/02/08
△		VDE额定电流由20A改为22A	Zengy	08/28/08

Notes:

1. Pitch: 5.0mm, Poles: 2-12P
2. Rated voltage/current: UL 300V/15A
VDE 250V/22A △
3. Operation temperatures: -40℃~+105℃
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 22~12AWG, 0.5~2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150		
to	to	to	to	to	to	to	to		
6	10	24	30	60	100	150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	DG167 Screws	S000001530 (H)	XX	Steel	Cr ³⁺ Zn	
2	DG167 Pin header	4022B00010 (H)	XX	Brass	SnCe	
1	DG167-5.0-Housing	4022A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (NCH) →		DFTO DZJ		DATE 06/10/05	
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE	
			MFO		DATE	
			APPLV		DATE	
	MM		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	.0 ± ±					
	.00 ± ±					
	.000 ± ±					
	ANGLES ± 1°		MATERIAL :		NAME	
		G.E :		DG167-5.0-XXP-1Y-00A(H)		
		FINISH :		DRAWING NO. DG167-5.0-E02		
THIRD ANGLE PROJECTION		SCALE : 1:1		/PART NO.		
				DO NOT SCALE DRAWING		
				SHEET 1 OF 1		
				SIZE A3 REV 17 08/28/08		