
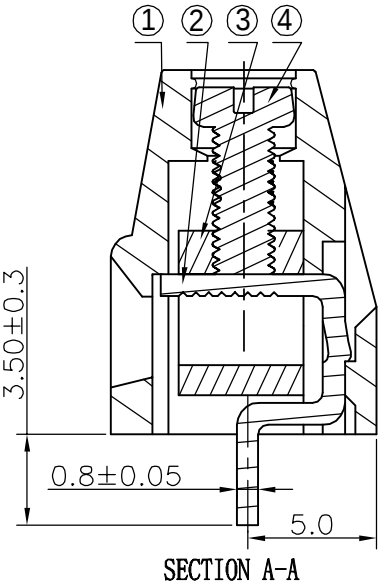


- Notes:
1. Pitch:5.0mm , Poles:2-XXP
  2. Rated voltage/current:UL 300V/15A VDE 250V/18A
  3. Operation temperatures:-40℃~+105℃
  4. Withstanding Voltage:AC2000V/1Min
  5. Insulation Resistance:5000MΩ /DC1000V
  6. Wire Range:24~12AWG, 2.5mm<sup>2</sup>
  7. Max. Torque Value:M2.5, 4.08kgf.cm
  8. Undimensioned Tolerances:

| REVISION RECORD |         |                |         |          |
|-----------------|---------|----------------|---------|----------|
| REV             | ECN     | DESCRIPTION    | DRFT    | DATE     |
|                 |         | Drawing Revise | Haoyh   | 03/22/06 |
|                 |         | Drawing Revise | WF      | 07/06/07 |
|                 |         | 增加VDE、CE标志     | LJH     | 11/09/07 |
|                 |         | 增加CQC刻字        | Zengy   | 02/10/08 |
|                 | 10-0246 | UL电流由10A变更为15A | Lasting | 08/04/10 |

| Pitch range in mm |              |               | Nominal dimension range in mm |                |                 |                    |
|-------------------|--------------|---------------|-------------------------------|----------------|-----------------|--------------------|
|                   | over 6 to 10 | over 10 to 24 | over 30 to 60                 | over 60 to 100 | over 100 to 150 | —                  |
| to 6              |              |               |                               |                |                 | ∩                  |
|                   |              |               |                               |                |                 | ∇                  |
| ±0.10             | ±0.15        | ±0.25         | ±0.2                          | ±0.3           | ±0.5            | ±0.7 ±1.0 0.05/1.0 |

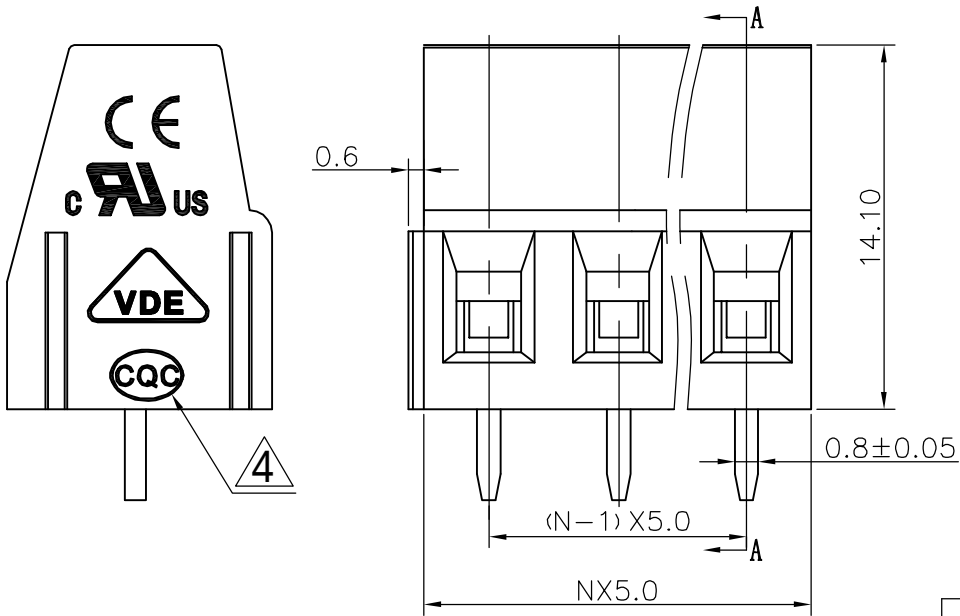

|   |                  |                |    |       |                     |
|---|------------------|----------------|----|-------|---------------------|
| 4 | DG128"-Screws    | S000001460 (H) | XX | Steel | Cr <sup>3+</sup> Zn |
| 3 | DG128-Cage       | X000000020 (H) | XX | Brass | Ni plated           |
| 2 | DG128-Pin header | 4027B00010 (H) | XX | Brass | SnCe                |

|                            |                   |                      |               |                                           |         |
|----------------------------|-------------------|----------------------|---------------|-------------------------------------------|---------|
| 1                          | DG128-5.0-Housing | 4027A0YXXA (H)       | 1             | PA66                                      | UL94V-0 |
| ITEM                       | NAME OF PART      | NO. OF PART          | Q'TY          | MATERIAL                                  | NOTES   |
| TOLERANCES EXCEPT AS NOTED |                   | DFTO DZJ             | DATE 01/13/05 | 宁波高正电子有限公司<br>DEGSON ELECTRONICS CO., LTD |         |
| MM                         |                   | CHKD                 | DATE          |                                           |         |
| .0 ±                       |                   | MFO                  | DATE          |                                           |         |
| .00 ±                      |                   | APPLV                | DATE          |                                           |         |
| .000 ±                     |                   | MATERIAL :           |               | NAME                                      |         |
| ANGLES ± 1°                |                   | G.E :                |               | DG128-5.0-XXP-1Y-00A(H)                   |         |
| THIRD ANGLE PROJECTION     |                   | FINISH :             |               | DRAWING NO. DG128-5.0-E06                 |         |
|                            |                   | SCALE : 1:1          |               | /PART NO.                                 |         |
|                            |                   | DO NOT SCALE DRAWING |               | SHEET 1 OF 1                              |         |