



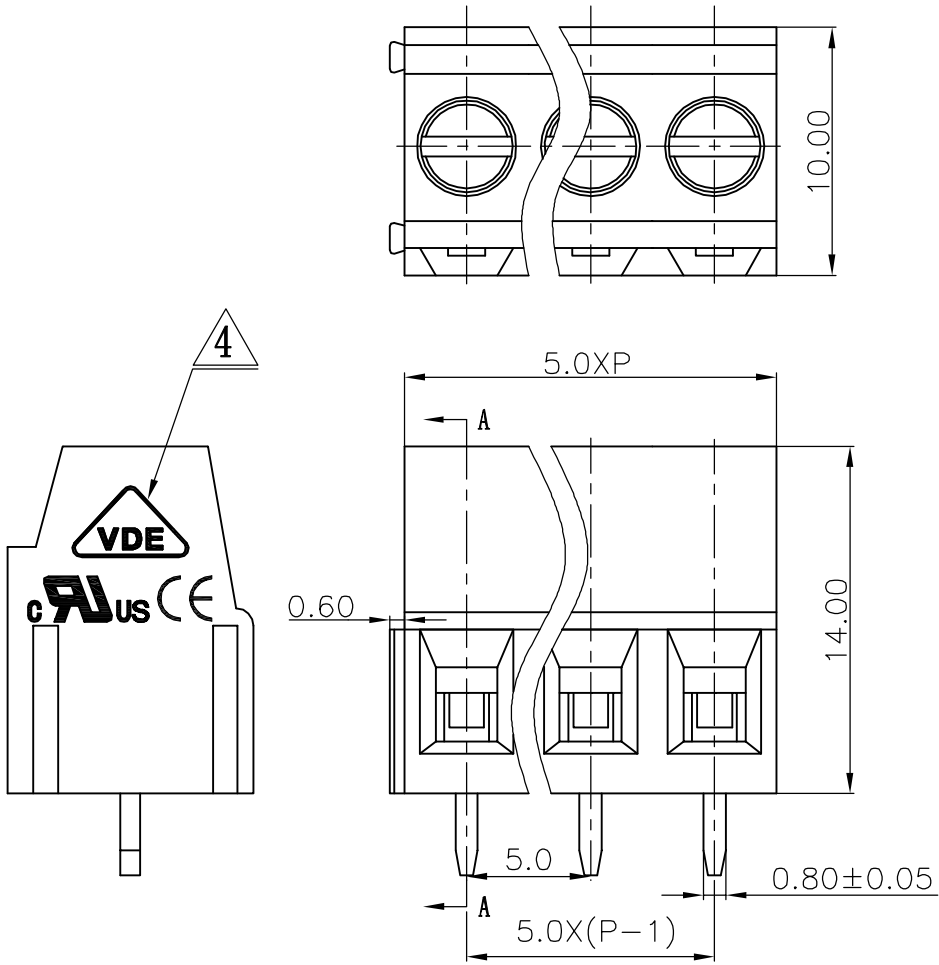

Notes:

1. Pitch:5.0mm
2. Rated voltage/current:UL 300V/15A △
VDE 250V/18A
3. Operation temperatures:-40° C~+105° C
4. Insulation Withstand Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:24-12AWG 2.5mm²
7. Max. Torque Value: 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

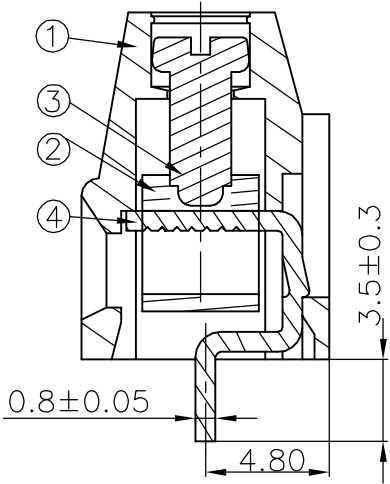


SECTION A-A



4	DG128-Pin	4027B00010 (H)	XX	Brass	SnCe
3	DG128 Screw-M2.5	S000001460 (H)	XX	Steel	Cr ³⁺ Zn
2	DG128 Brass Cage	X000000020 (H)	XX	Brass	Ni plated

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	04/18/06
△		针宽由0.9±0.05改为0.8±0.05	YeJ	02/05/07
△		修改UL刻字	CSX	08/03/07
△		增加VDE、CE标志	LJH	11/14/07
△	10-0245	UL电流10A变更为15A	Lasting	08/02/10

1	DG500-5.0-Housing		4045A0YXXA (H)		1	PA66	UL94V-0
ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTD Haoyh		DATE 06/27/05"		
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE		
			MFO		DATE		
			APPVL		DATE		
	MM				DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	.0 ±		±				
	.00 ±		±				
	.000 ±		±		NAME DG500-5.0-XXP-1Y-00A(H)		
	ANGLES ± 1°		G.E :				
			MATERIAL :				
		FINISH :		DRAWING NO. DG500-5.0-E02			
THIRD ANGLE PROJECTION		SCALE :		/PART NO.			
				DO NOT SCALE DRAWING			
				SHEET 1 OF 1			