
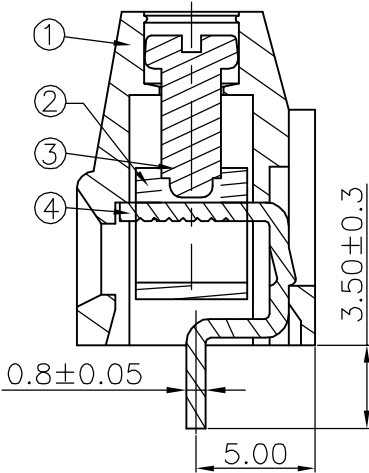




- Notes:
1. Pitch:5.08mm
 2. Rated voltage/current:UL 300V/15A Δ
VDE 250V/18A
 3. Operation temperatures:-40° C~+105° C
 4. Insulation Withstand Voltage:AC2000V/1Min
 5. Insulation Resistance:5000M Ω /DC1000V
 6. Wire Range:24-12AWG 2.5mm²
 7. Max. Torque Value: 4.08kgf.cm
 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
Δ		Drawing Revise	Haoyh	83/31/86
Δ		??VDE?CE??	LJH	11/14/07
Δ	10-0245	UL电流由10A变更为15A	Lasting	08/02/10

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0
							0.05/10

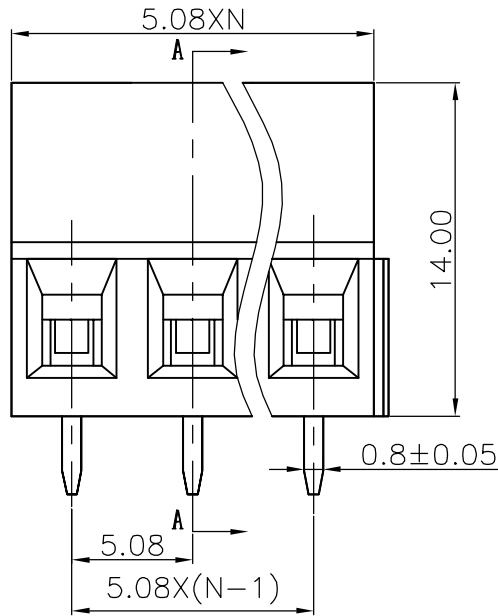

SECTION A-A

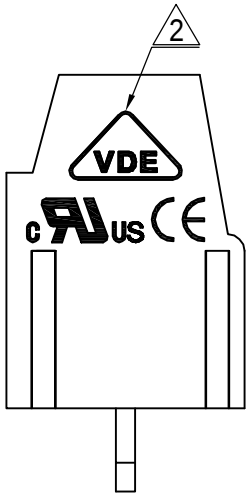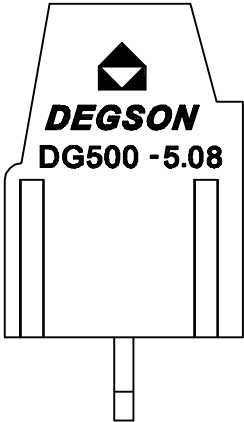

4	DG128-Pin header	4027B00010(H)XX	Barss	SnCe
3	DG128"-Screws	S000001460(H)XX	Steel	Cr ³⁺ Zn
2	DG128 Brass Cage	X000000020(H)XX	Brass	Ni plated

1	DG500-5.08 Housing	4036A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO HW	DATE 09/23/05	DEGSN [®] 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
ANGLES $\pm 1^\circ$		G.E :		NAME	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG500-5.08-E02	
		SCALE : 1;1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	