
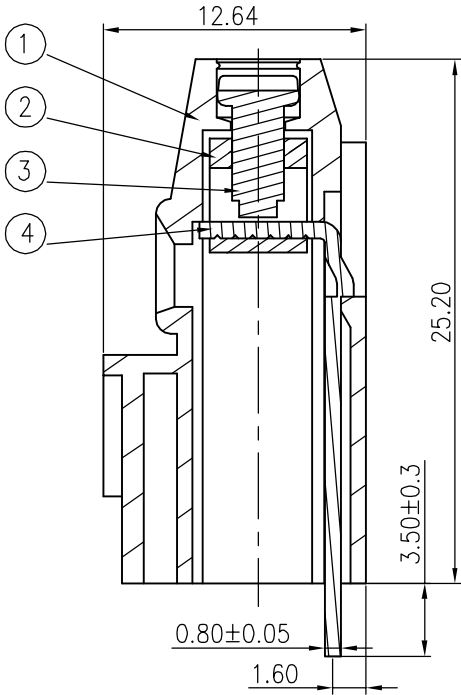




- Notes:
- 1. Pitch:5.08mm
 - 2. Rated voltage/current:UL 300V/20A
VDE 250V/24A
 - 3. Operation temperatures:-40° C~+105° C
 - 4. Insulation Withstand Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:28-12AWG, 2.5mm²
 - 7. Max. Torque Value: M2.5 4.08kgf.cm
 - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	03/08/06
2		品名、料号增加环保标示“(0)”	CSX	12/10/07

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

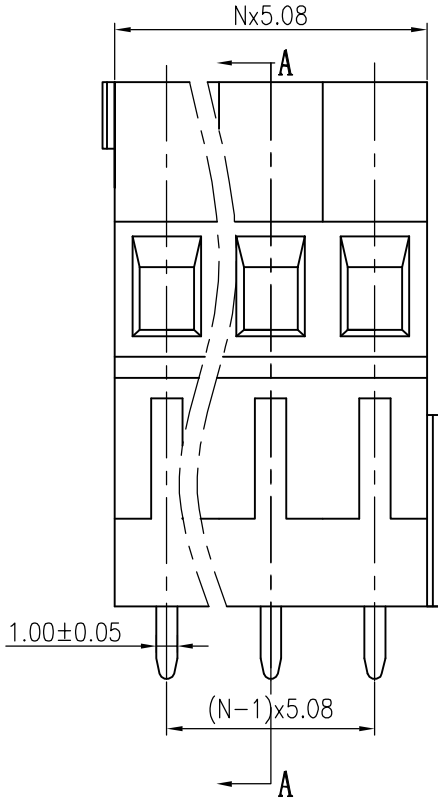

SECTION A-A

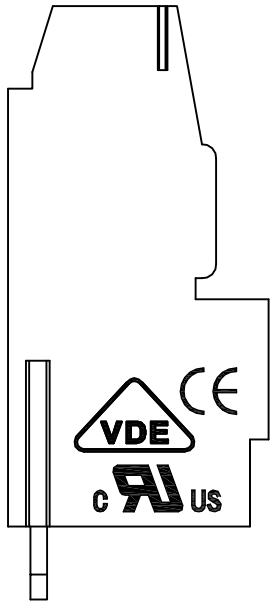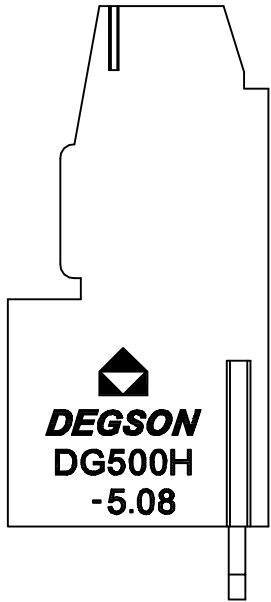

4	DG500H-Pin header	4038B00010 (H)	XX	Barss	SnCe
3	DG128"-Screws	S000001460 (H)	XX	Steel	Cr ³⁺ Zn
2	DG128 Cage	X000000020 (H)	XX	Brass	Ni plated

1	DG500H-5.08-Housing	4038A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhwm	DATE 07/19/04	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
MATERIAL :		G.E :		NAME	
ANGLES ± 1°		FINISH :		DG500H-5.08-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		SCALE : 1:1		DRAWING NO. DG500H-5.08-E01	
				/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	