



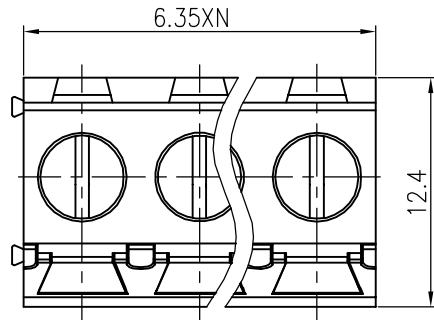


Notes:


1. Pitch: 6.35mm
2. Rated volatge/current:UL 300V/30A
VDE 450V/32A
3. Insulation resistance: 5000M Ω /DC1000V
4. Withstanding voltage: AC2000V/1Min
5. Wire range: 26-10 AWG 4mm²
6. Temp. range: -40° C~+105° C
7. Torque: 5. 10kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm				
to	over	over	to	over	over	over	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	03/27/06
2		增加UL刻字	CSX	10/04/06
3		增加VDE、CE标志	LJH	11/09/07
4		增加VDE参数	LJH	01/09/08

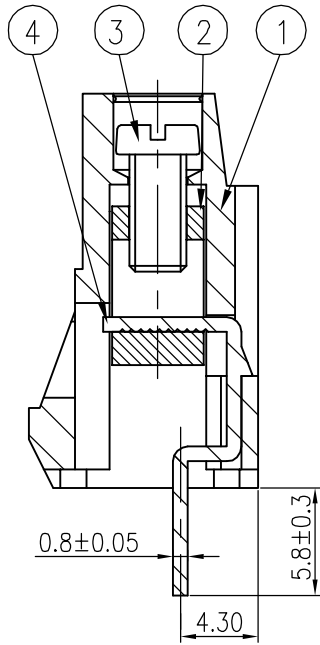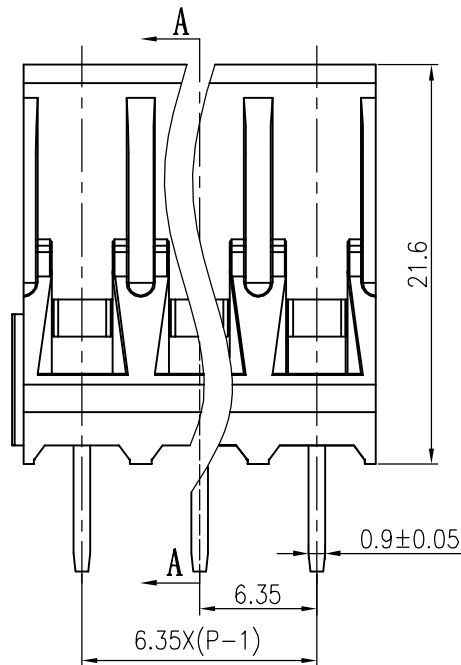

截面 A-A

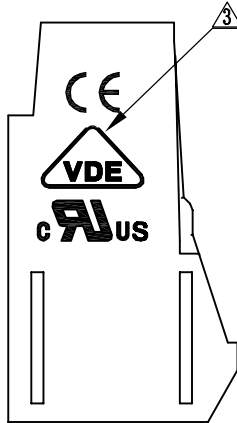

4	DG635-Pin header	4030B00010 (H)	XX	Brass	SnCe
3	DG950"-Screws	S000001690 (H)	XX	Steel	Cr ³ Zn
2	DG950 Cage	X000000310 (H)	XX	Brass	Ni plated

1	DG635-6.35 Housing	4030A0YXXA (H)	1	PA66	UL94Y-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Haoyh	DATE 05/07/05	DEGSN [®] 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
ANGLES ± 1°		G.E :		NAME	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG635-6.35-E01	
		SCALE : 1:1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	