
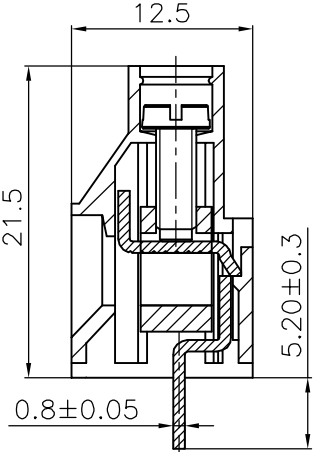


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		品名、料号增加环保标示“(H)”	CSX	12/10/07	

- Notes:
1. Pitch: 9.52mm
 2. Rated volatge/current: UL 300V/30A
VDE 750V/26A
 3. Insulation resistance: 5000MΩ/DC1000V
 4. With standing voltage: AC2000V/1Min
 5. Wire range: 22-10AWG 4mm²
 6. Temp. range: -40° C~+105° C
 7. Torque: 5. 10kgf.cm
 8. Undimensioned Tolerances:


Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

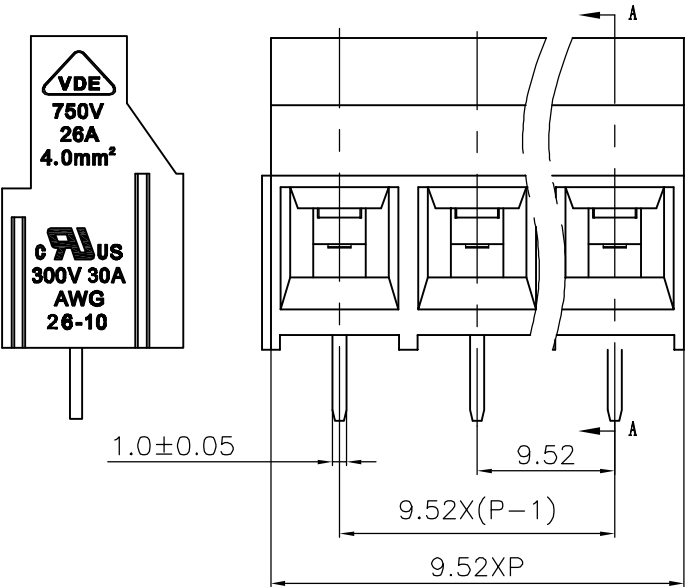

Section A-A



4	DG950-Pin header	4031B00010(H)	XX	Brass	SnCe
3	DG950 "—"Screws	S000001690(H)	XX	Steel	Cr ³⁺ Zn
2	DG950-Contact	X000000310(H)	XX	Brass	Ni plated

1	DG950-9.5-Housing	4031A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED				
	MM				
	.0 ± ± .00 ± ± .000 ± ±				
	ANGLES ± 1°		NAME DG950-9.5-XXP-1Y-00A(H)		
			DRAWING NO. DG950-9.5-E01		
	THIRD ANGLE PROJECTION		/PART NO.		
	SCALE : 1:1		DO NOT SCALE DRAWING		
			SHEET 1 OF 1		