

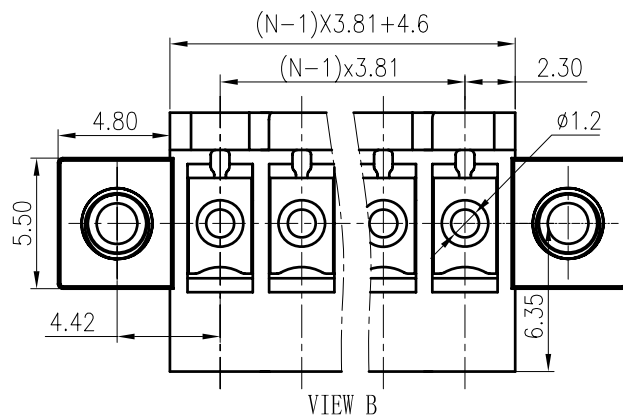
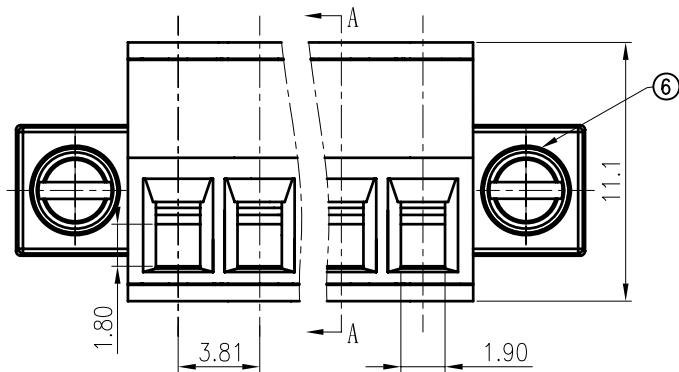
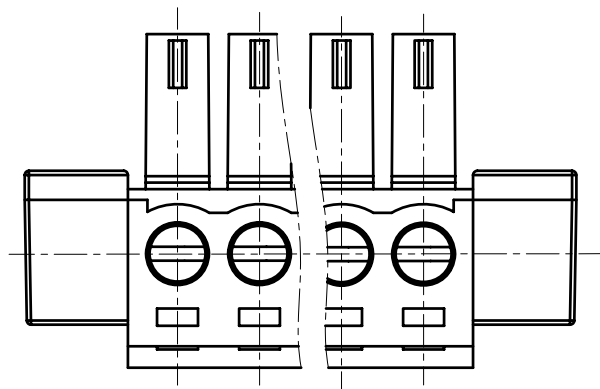


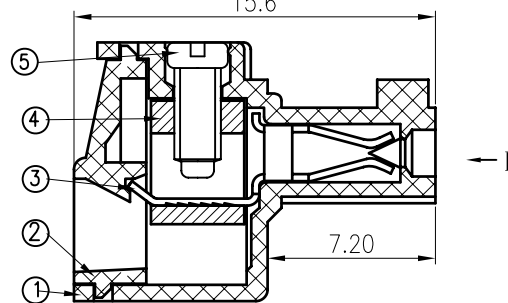

6	2EDG-""Screws	△ S000000980 (H)	2	Steel	Cr ³⁺ Zn
5	15EDG-""Screws	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
4	15EDG-Brass cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG-Clamp	1001B00010 (H)	XX	Phospor Bronze	Ni plated
2	15EDGK-3.81-Cover	1010C0YXXA (H)	1	PA66	UL94V-0

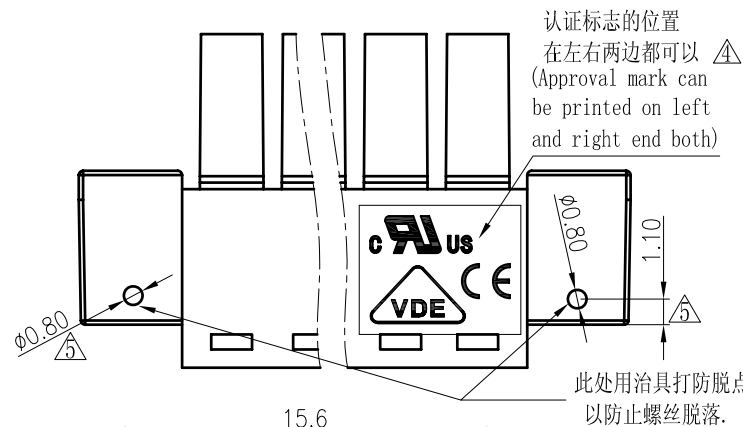

SECTION A-A

Notes:

- Pitch:3.81mm , Poles:2-24P
- Rated voltage/current:UL 300V/8A
VDE 250V/7A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC2000V/1min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:28~16AWG, 0.5~1.5mm²
- Max. Torque Value:M2, 2.04kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

1	15EDGKM-3.81-Housing	1038A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME 15EDGKM-3.81-XXP-1Y-00A (H)					
DRAWING NO. 15EDGKM-3.81-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					