


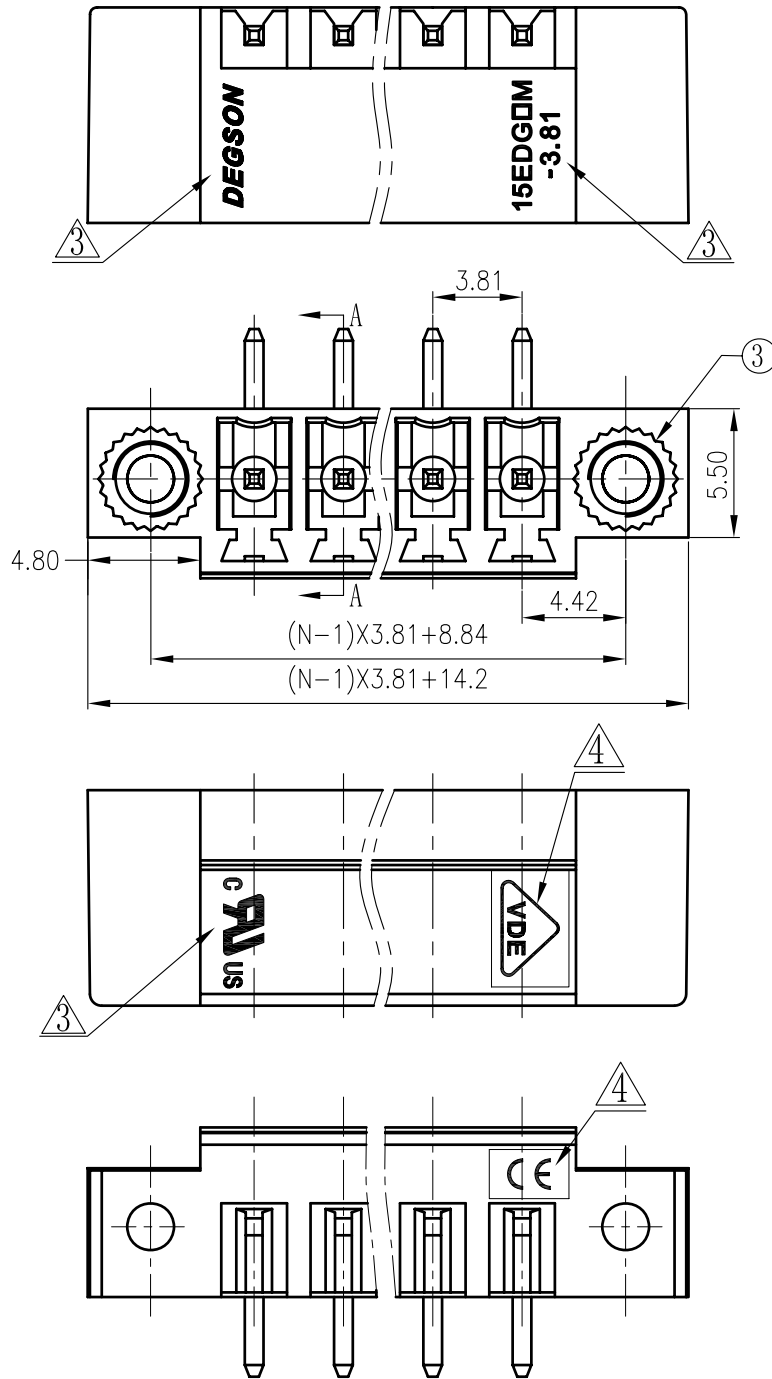



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
2		Drawing emend	WF	04/07/06*
3		增加商标、品名、UL刻字	WLM	08/06/08*
4		增加VDE, CE刻字	Zengy	01/15/09*

Notes:

1. Pitch: 3.81mm poles: 2-24p
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Withstanding voltage: AC2000V/1min
5. Insulation resistance: 5000M Ω /DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

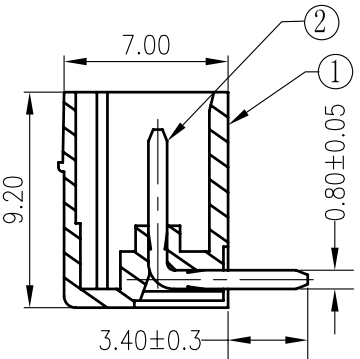

3	2EDG screw cap	S000000040 (H)	2	Brass	
2	15EDGRC Pin header	1003B00010 (H)	XX	Brass	SnCe
1	15EDGV (R) M-3.81-Housing	1004A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		DFTO DZJ		DATE 09/14/05*
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE
			MFO		DATE
			APPVL		DATE
			MATERIAL :		
	ANGLES ± 1°		G.E :		
			FINISH :		
	THIRD ANGLE PROJECTION		SCALE : 1:1		
 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			NAME 15EDGRM-3.81-XXP-1Y-00A (H)		
DRAWING NO. 15EDGRM-3.81-E02				SIZE A3	REV T4 01/15/09*
/PART NO.					
DO NOT SCALE DRAWING				SHEET 1	OF 1