


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		Drawing amend	Home	04/07/06	
2		增加商标、品名、UL刻字	WLM	08/06/08	
3		增加VDE, CE刻字	Zengy	01/15/09	



Notes:

1. Pitch: 3.5mm poles:2-24p
2. Rated voltage/current: UL 300V/8A
 VDE 250V/7A
3. Operation tempratures:-40° C~+105° C
4. Withstanding voltage: AC2000V/1Min
5. Insulation resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▤
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



SECTION A-A

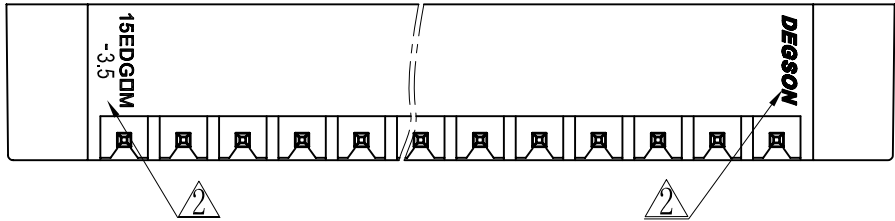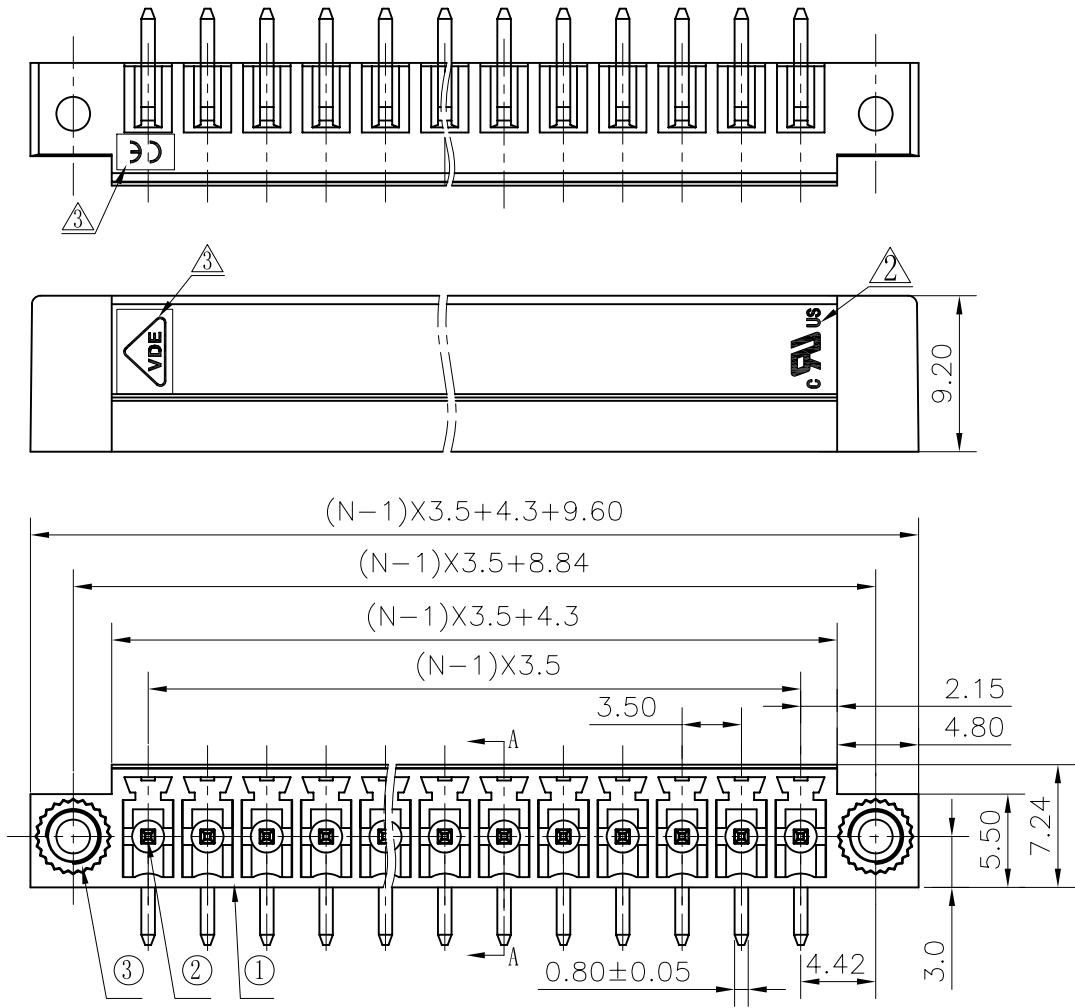

3	2EDG-screw cap	S000000040(H)	2	brass	
2	15EDGRC Pin header	1003B00010(H)	XX	brass	SnCe

1	15EDGVM-3.5 Housing	1040A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
DETACHED LISTS		NAME 15EDGRM-3.5-XXP-1Y-00A(H)			
ANGLES ± 1°		DRAWING NO. 15EDGRM-3.5-E01			
THIRD ANGLE PROJECTION		/PART NO.			
		SCALE : 1:1			
		DO NOT SCALE DRAWING			
		SHEET 1 OF 1			