

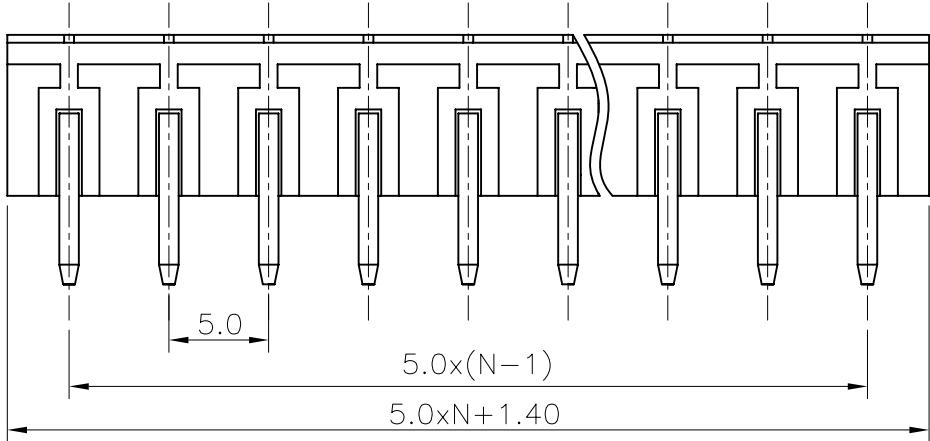

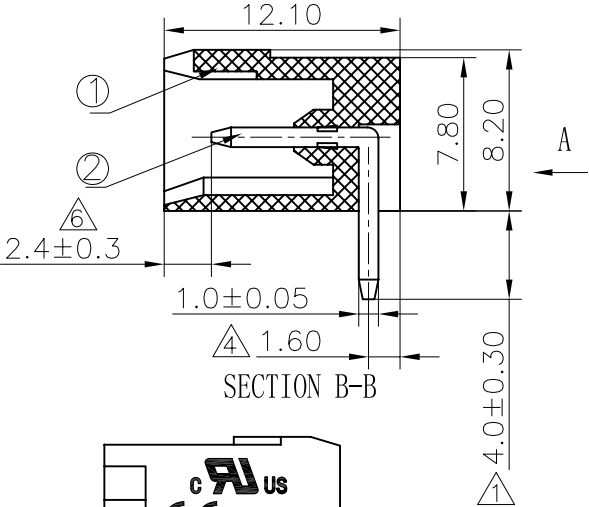


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1		4.5±0.1变更到4.0±0.3	DZJ	06/14/'05
△2		图面更新	CSX	04/08/'06
△3		增加VDE、CE刻字	YeJ	02/26/08*
△4		更新图面	LJH	04/16/08*
△5		增加自动化方针	WLM	09/23/08*
△6	10-0329	增加标注尺寸	COCO	10/04/10*

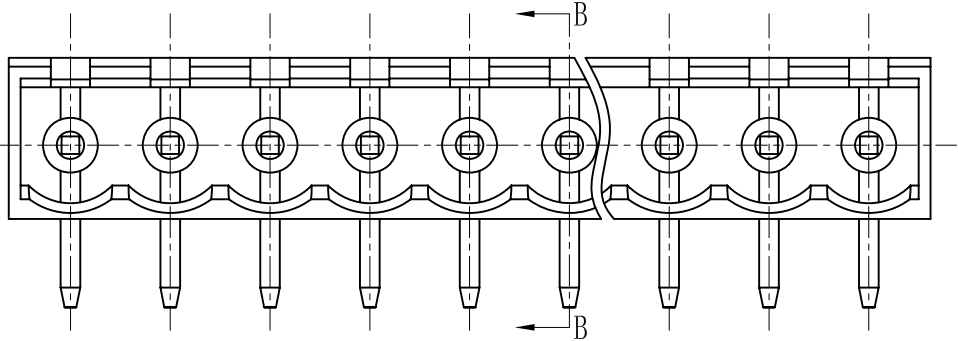

VIEW A

- Notes:
- 1.Pitch:5.0mm ,Poles:2-24P
 - 2.Rated voltage/current:UL 300V/15A
VDE 320V/20A
 - 3.Operation temperatures:-40℃~+105℃
 - 4.Withstanding Voltage:AC2000V/1Min
 - 5.Insulation Resistance:5000MΩ/DC1000V
 - 6.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	2EDGR-Pin header	△5 1008B00120 (H)	XX	Brass	Automatic assembly
2	2EDGR (A)-Pin header	1008B00040 (H)	XX	Brass	Manual assembly
1	2EDGRC-5.0 Housing	1019A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME 2EDGRC-5.0-XXP-1Y-00A(H)					
DRAWING NO. 2EDGRC-5.0-E02					
/PART NO.					
SIZE A3					
REV T6					
10/04/10*					
DO NOT SCALE DRAWING				SHEET 1	OF 1