

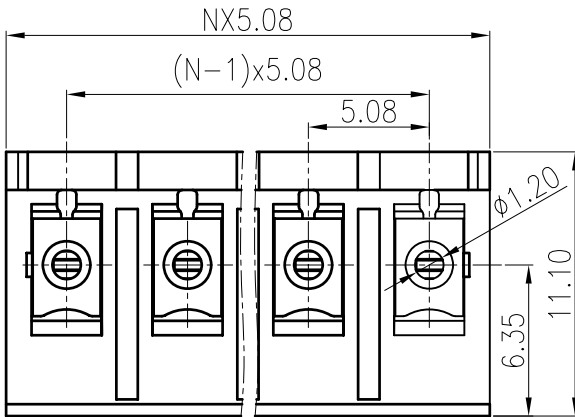
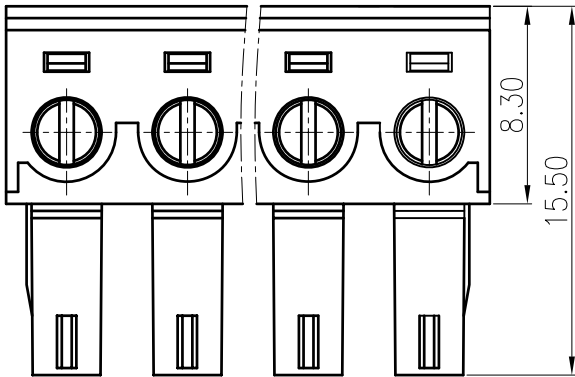
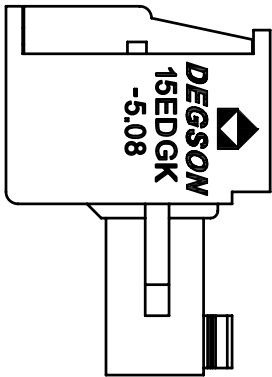


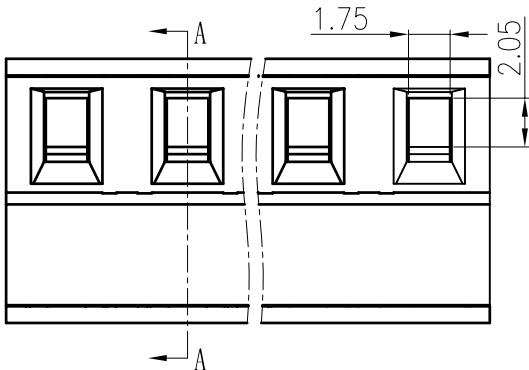


Notes:

1. Pitch:5.08mm ,Poles:2-12P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28~16AWG, 0.5~1.5mm²
7. Max. Torque Value:M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	10	24	30	60	100	150	∅
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/1.0

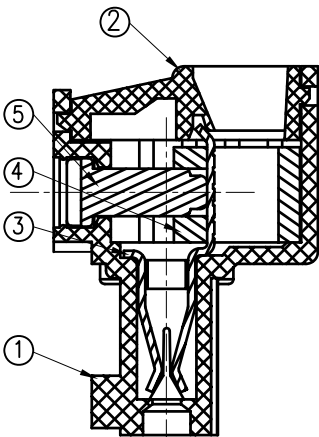

SECTION A-A

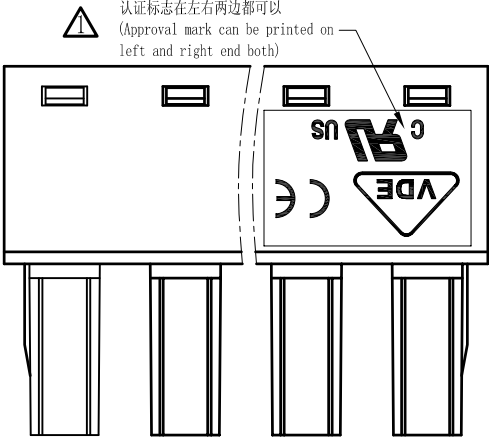

认证标志在左右两边都可以
(Approval mark can be printed on left and right end both)

5	15EDG-“”Screws	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
4	15EDG-Brass cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG-Clamp	1001B00010 (H)	XX	Phospor Bronze	Ni plated
2	15EDGK-5.08-Cover	1168C0YXXA (H)	1	PA66	UL94V-0

1	15EDGK-5.08-Housing	1168A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm	DATE 12/14/07*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME	
ANGLES ± 1°		G.E :		15EDGK-5.08-XXP-1Y-00A (H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. 15EDGK-5.08-E01	
		SCALE : 1:1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
15EDGK-5.08-XXP-1Y-00A (H)

DRAWING NO. 15EDGK-5.08-E01
/PART NO.

SCALE : 1:1
DO NOT SCALE DRAWING

SHEET 1 OF 1