
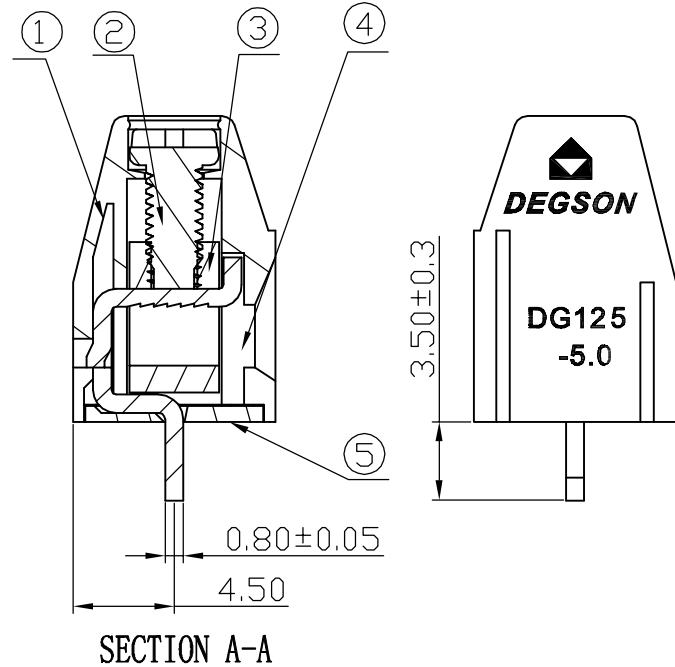
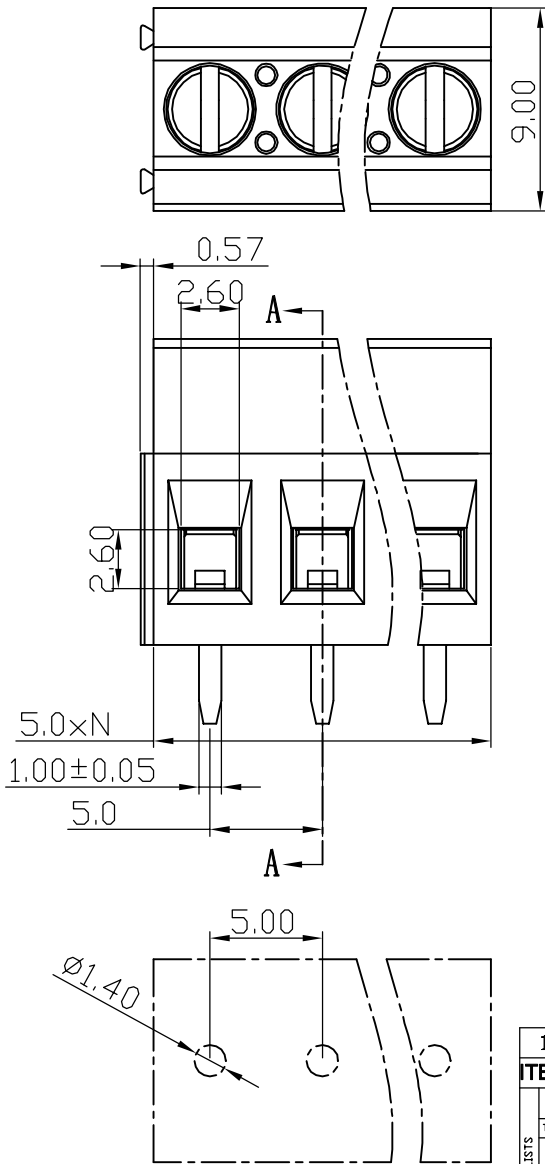


REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		增加VDE,CE刻字	Zengy	04/06/09"	
△	09-0136	增加UL刻字及参数	GHY	12/05/09"	
△		图面整理	hyq	01/21/10"	

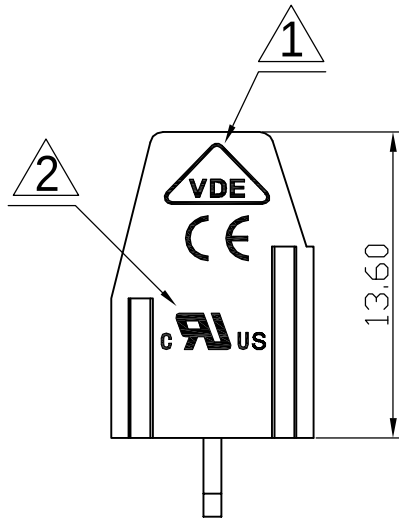

Notes:

1. Pitch:5.0mm ,Poles:2-XXP
- △ 2. Rated voltage/current: UL 300V/12A
VDE 250V/18A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1min
- △ 5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:26~12AWG, 0.5~2.5mm²
7. Max. Torque Value:M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	mm
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	EI100 2.5-5.0 Cover	4093C0YXXA(H)	1	PA66	UL94V-0
4	EI100 2.5 Pin header	4093B00010(H)	XX	Brass	SnCe plated
3	EI100 2.5" Screws (M2.5)	S000002650(H)	XX	Steel	Cr ³ Zn
2	EI100 2.5 Cage	X000001890(H)	XX	Brass	Ni plated

1	DG125-5.0 Housing	4145A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS					
TOLERANCES EXCEPT AS NOTED		DATE 10/15/08"	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM		CHKD			
.00 ±		DATE			
.000 ±		DATE			
ANGLES ± 1°		DATE	NAME DG125-5.0-XXP-1Y-00A(H)		
THIRD ANGLE PROJECTION		MATERIAL			
SCALE: 1:1		G.E.			
		FINISH:			
DO NOT SCALE DRAWING				SHEET 1	OF 1