


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

- Notes:
- 1. Pitch:7.5mm ,Poles:2-XXP
 - 2. Rated voltage/current:UL 300V/10A
VDE 450V/24A
 - 3. Operation temperatures:-30℃~+120℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:22~14AWG, 2.5mm²
 - 7. Max. Torque Value:M3, 5.10kgf. cm
 - 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

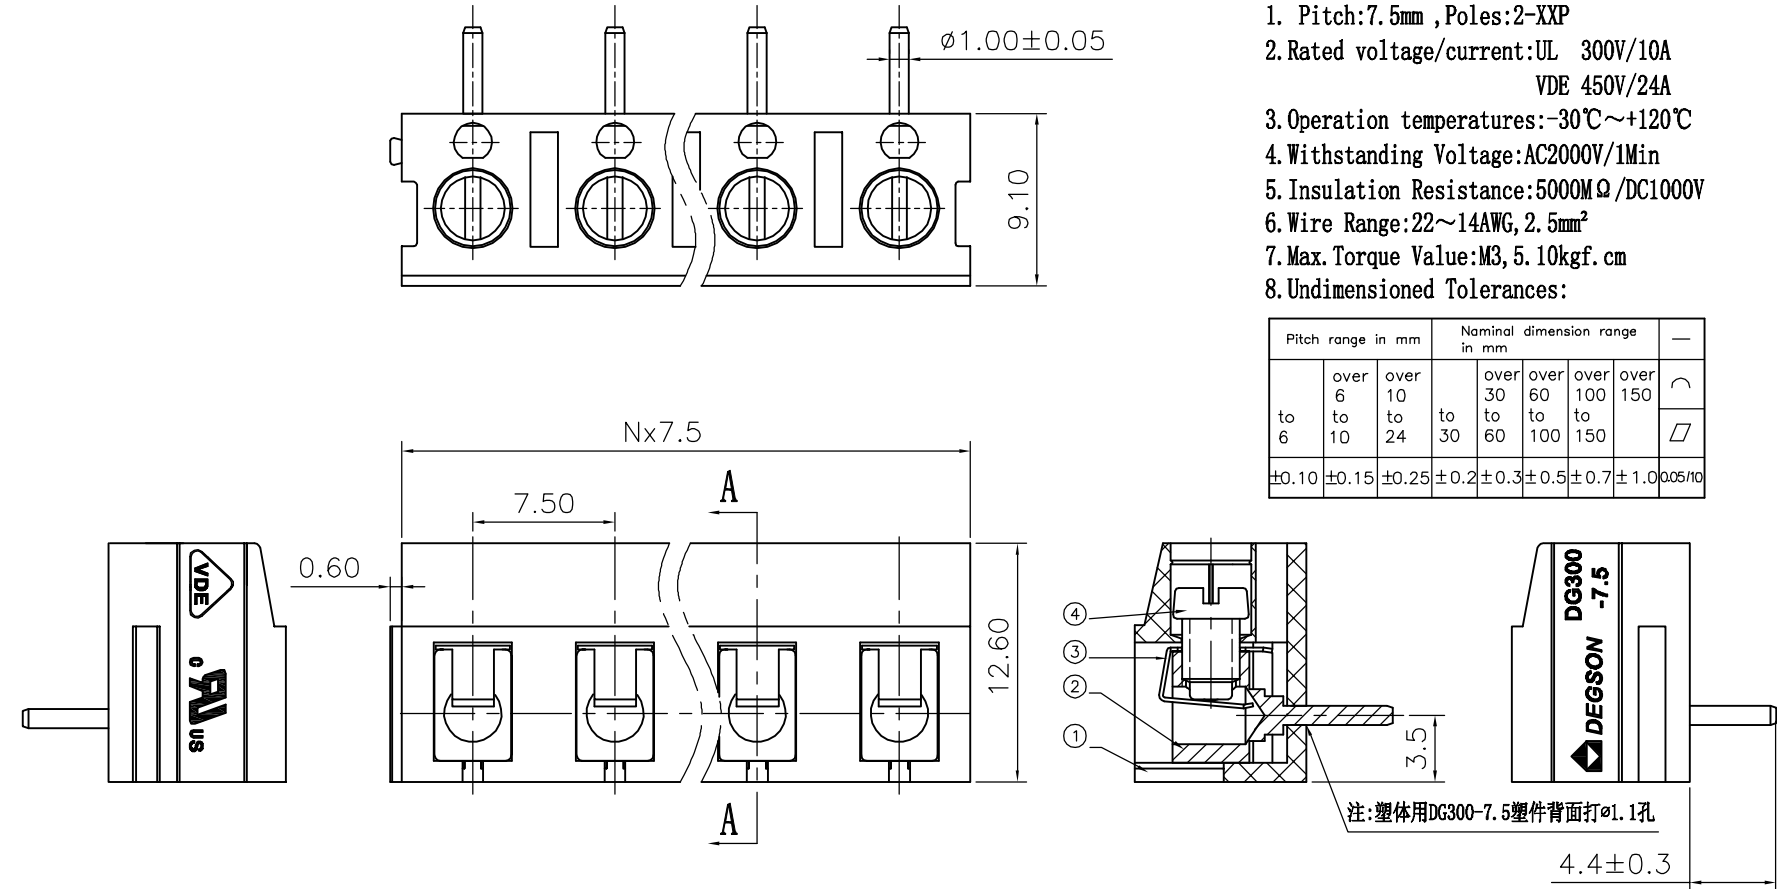

SECTION A-A

4	DG300"——" Screws (M3*5.3)	S000001380 (H)	XX	Steel	Cr ³⁺ Zn
3	DG300-Spring	X000000230 (H)	XX	Stainless steel	
2	DG300R-Pin header	4002B00010 (H)	XX	Brass	SnCe

1	DG300-7.5 Housing	4001A0YXXA (H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ± ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTO L/JH CHKD MFO DATE DATE DATE MATERIAL : G.E : FINISH : SCALE : 1:1 DATE 04/16/08 DATE DATE DATE G.E : FINISH : SCALE : 1:1					
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG300R-7.5-XXP-1Y-00A(H) DRAWING NO. DG300R-7.5-E01 /PART NO. SIZE A3 REV TO 04/16/08					
DO NOT SCALE DRAWING				SHEET 1	OF 1