

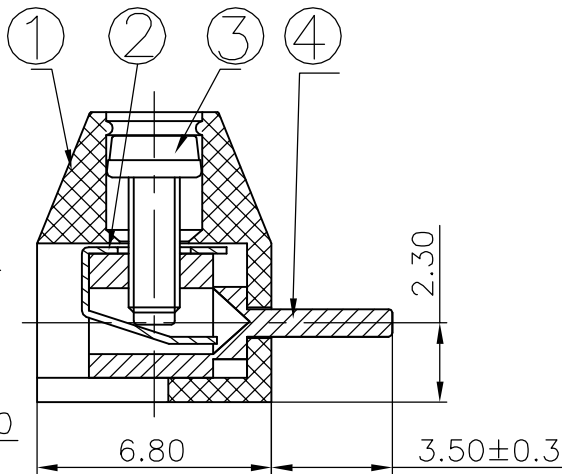
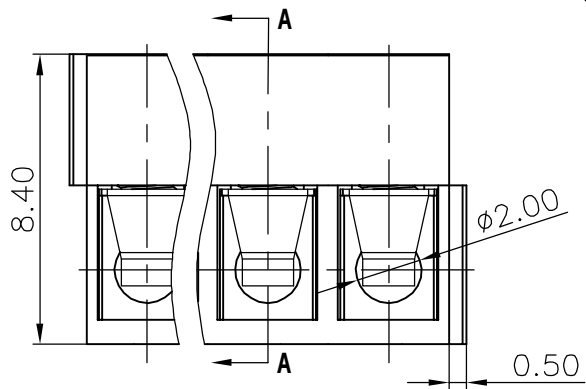


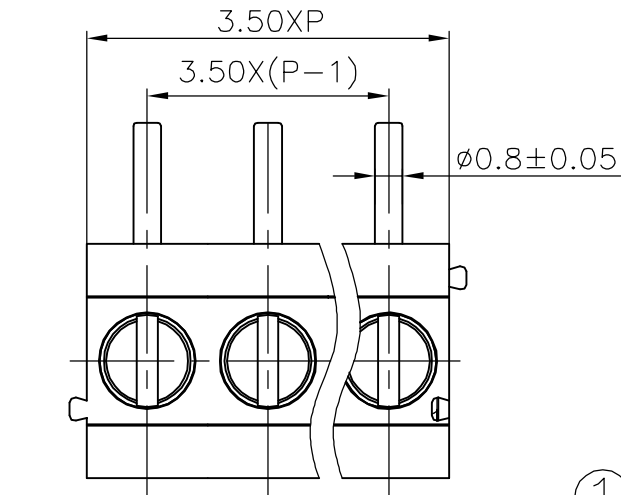

SECTION A-A



Notes:

- 1.Pitch:3.5mm
- 2.Rated voltage/current:UL 300V/10A
VDE 130V/10A
- 3.Operation temperatures:-40℃~+105℃
- 4.Withstanding Voltage:AC2000V/1min
- 5.Insulation Resistance:5000MΩ /DC1000V
- 6.Wire Range:24-18AWG,1mm²
- 7.Max.Torque Value:M2,2.04kgf.cm
- 8.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10		over 30	over 60	over 100	over 150	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	DG350R-Pin header	4018B00010(H)	XX	Brass	SnCe
3	DG350- Screws	S000001400(H)	XX	Steel	3+ Cr Zn
2	DG350-Cage	X000000290(H)	XX	Phosphor bronze	Ni plated

1	DG350-3.5-Housing	4018A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO L IUM	DATE 10/04/05"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM		CHKD	DATE		
.0 ±		MFO	DATE		
.000 ±		APPVL	DATE		
ANGLES ± 1°		MATERIAL :		NAME	
THIRD ANGLE PROJECTION		G.E :		DG350R-3.5-XXP-1Y-00A(H)	
		FINISH :		DRAWING NO. DG350R-3.5-E02	
		SCALE :		/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/18/06
△		修改刻字	CSX	09/25/06
△		增加VDE刻字	LJH	12/28/07"