

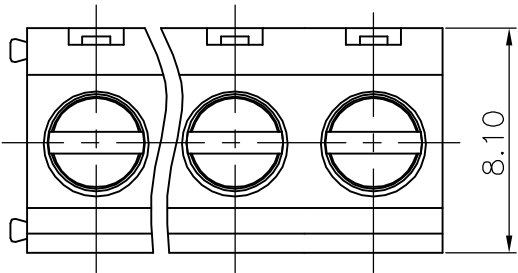


REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		Drawing Revise	Haoyh	06/27/06	
△		增加VDE、CE标志	LJH	11/15/07	
△		增加VDE参数	LJH	01/03/08	


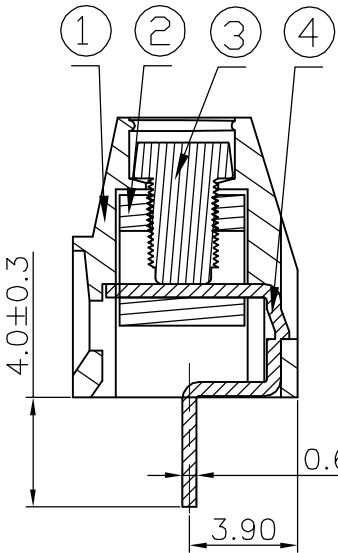


- Notes:
- 1.pitch: 5.00mm
 - 2.Rated voltage/current:UL 300V/12A
VDE 250V/15A
 - 3.Insulation resistance: 5000MΩ/DC1000V
 - 4.Withstanding voltage: AC2000V/1Min
 - 5.Wire range: 26~14AWG 1.5mm²
 - 6.Temp.Range: -40° c ~+105° c
 - 7.Torque: M2.5 4.08kgf.cm
 - 8.Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

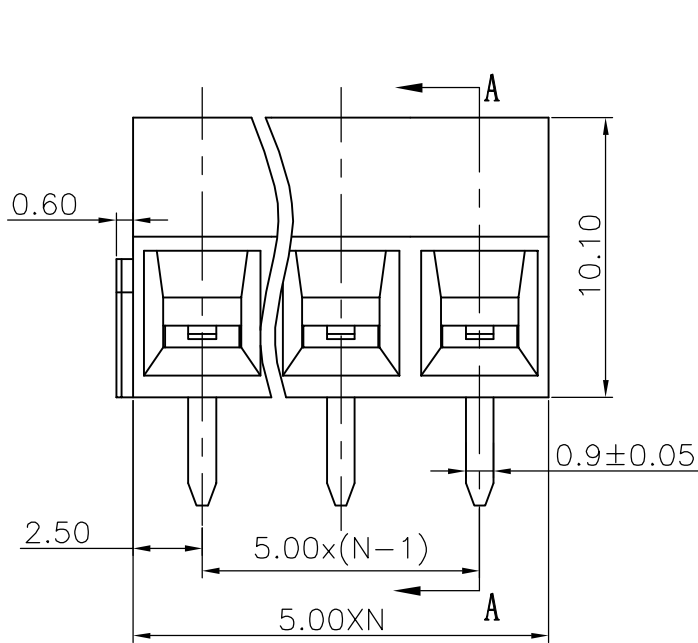

SECTION A-A

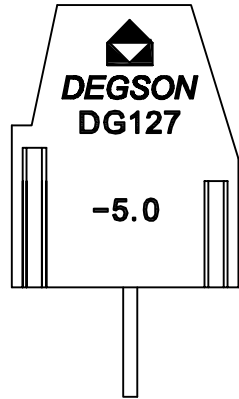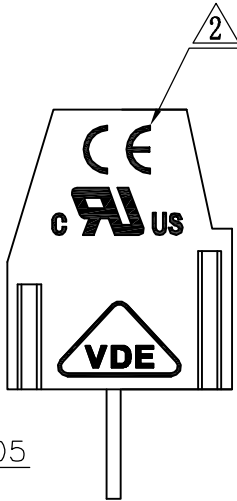

4	DG127 Pin	4028B00010 (H)	XX	Brass	SnCe
3	DG127 "—"Screws	S000001450 (H)	XX	Steel	C ³ Zn
2	DG127 Cage	X000000170 (H)	XX	Brass	Ni plated

1	DG127-5.0 Housing	4028A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG127-5.0-XXP-1Y-00A(H)					
DRAWING NO. DG127-5.0-E05					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					