



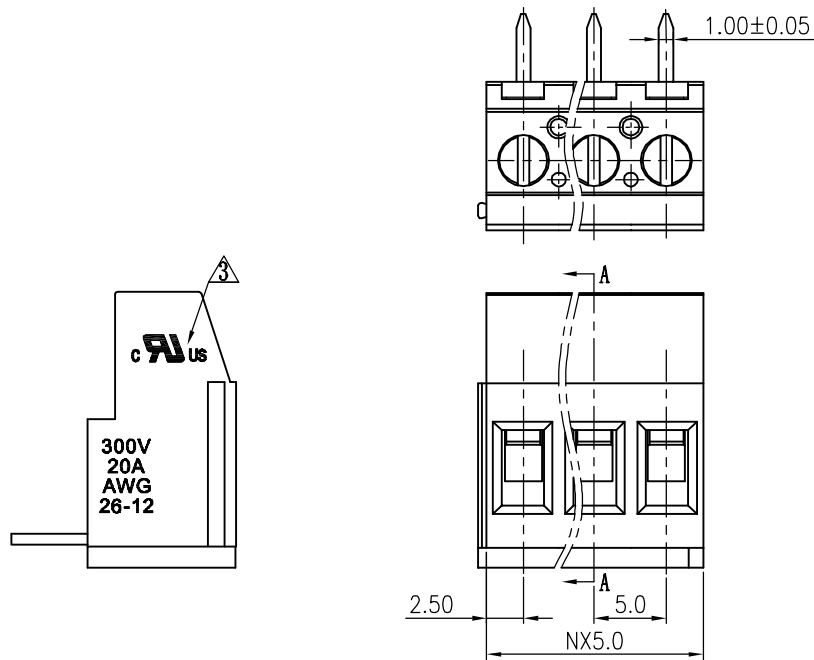



Notes:

1. Pitch:5.0mm , Poles:2-XXP
2. Rated voltage/current:UL 300V/20A
VDE 250V/20A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:26~12AWG, 0.5-2.5mm²
7. Max. Torque Value:M3, 5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

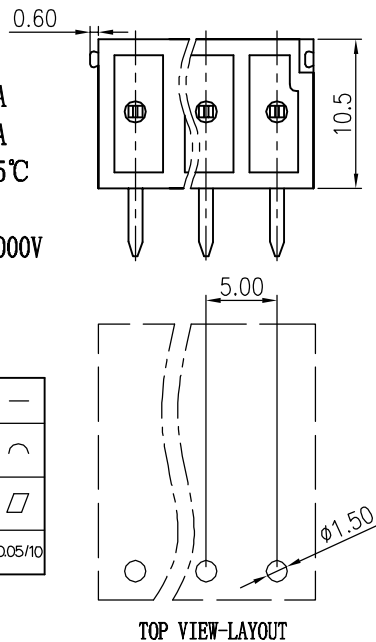

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	06/12/06
2		增加VDE标志	C SX	01/12/07
3		UL标志中去掉小R	C SX	08/09/07
4		修改出脚尺寸5.1为5.4	LJH	04/25/09

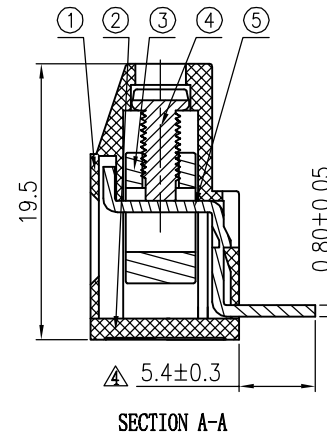

5	DG129R-Pin header	4034B00010 (H)	XX	Barss	SnCe
4	DG129-Screws-M3	S000001430 (H)	XX	Steel	Cr ³⁺ Zn
3	DG129-Contact	X000000200 (H)	XX	Brass	Ni plated
2	DG129-5.0 Cover	4029C0YXXA (H)	1	PA66	UL94V-0
1	DG129R-5.0 Housing	4034A0YXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG129R-5.0-XXP-1Y-00A(H)					
DRAWING NO. DG129R-5.0-E02					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					