

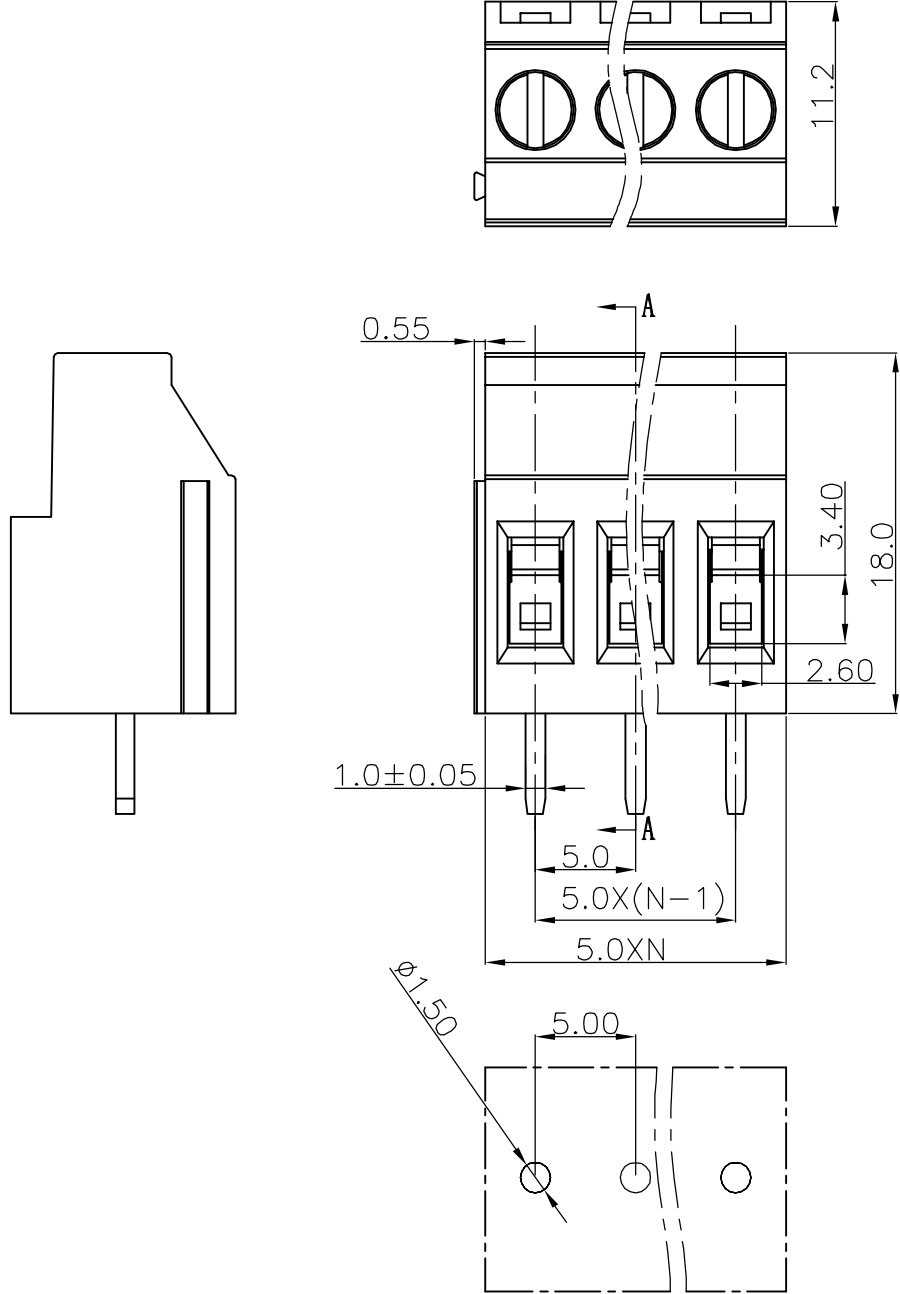


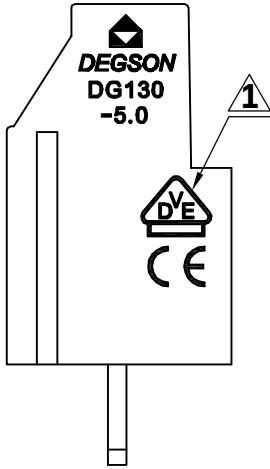

- Notes:
- 1. Pitch:5.0mm ,Poles:2-XXP
 - 2. Rated voltage/current:UL1059 300/20A
VDE 250V/20A
 - 3. Operation temperatures:-40℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:26~12AWG, 0.5~2.5mm²
 - 7. Max. Torque Value:M3, 5.1kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

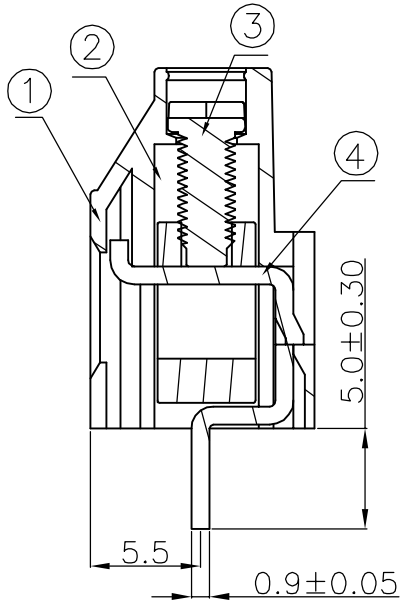

4	DG130-Pin header	4087B00010(H)	XX	Barss	SnCe plated
3	DG129-Screws-M3	S000001430(H)	XX	Steel	Cr ³⁺ Zn
2	DG129-Cage	X000000200(H)	XX	Brass	Ni plated
1	DG130-5.0-Housing	4087A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO LINDA	DATE 05/24/08"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME	
ANGLES ± 1°		G.E :		DG130-5.0-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG130-5.0-E01	
		SCALE : 1:1		/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET OF	