
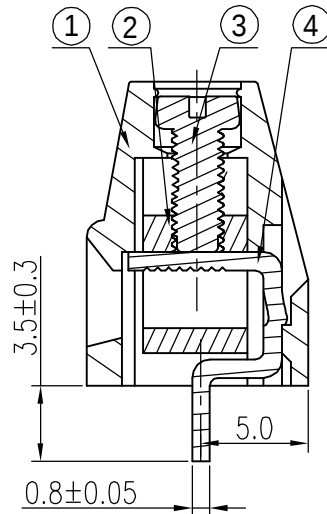


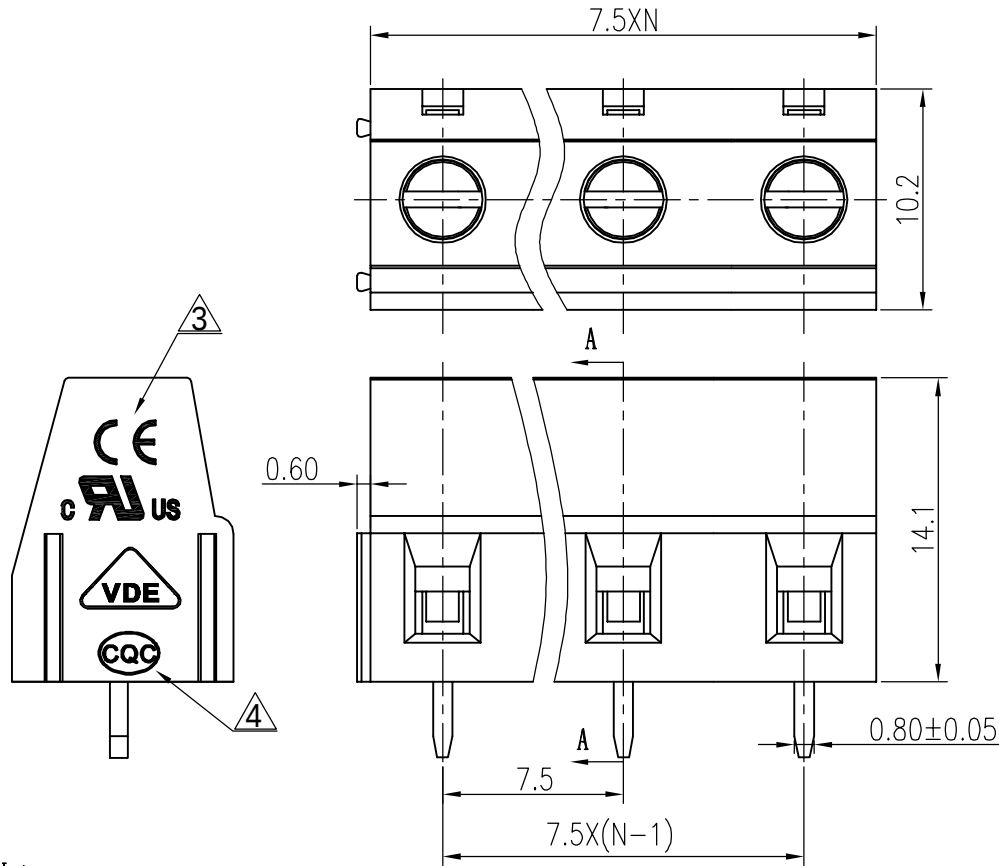

SECTION A-A

Notes:

1. Pitch: 7.5mm, Poles: 2-XXP
2. Rated voltage/current: UL 300V/15A △
VDE 450V/18A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 24-12AWG, 2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	◇

4	DG128 pin Header	4027B00010(H)	XX	Brass	SnCe
3	DG128 "—" screw	S000001460(H)	XX	Steel	3 ⁺ Cr Zn
2	DG128 Cage	X000000020(H)	XX	Brass	Ni plated

REVISION RECORD				
REV	BCN	DESCRIPTION	DEPT	DATE
△		Drawing Revise	Haoyh	03/23/06
△		增加VDE、CE标志	CSX	12/06/07
△		增加VDE参数	LJH	01/12/08
△		增加CQC刻字	WLM	02/10/09
△	10-0246	UL电流由10A变更为15A	Lasting	08/05/10

1	DG128-7.5-Housing	4026A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG128-7.5-XXP-1Y-00A(H) DRAWING NO. DG128-7.5-E02 /PART NO. DO NOT SCALE DRAWING					
SHEET 1 OF 1					