

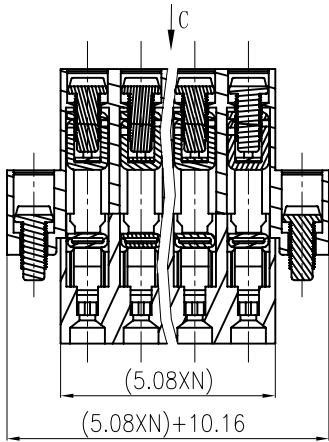
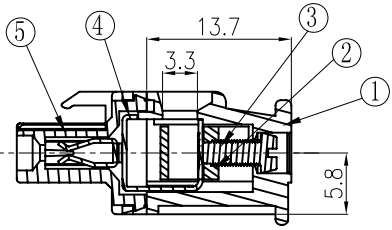







VIEW C

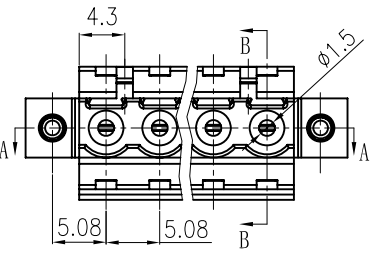

SECTION A-A

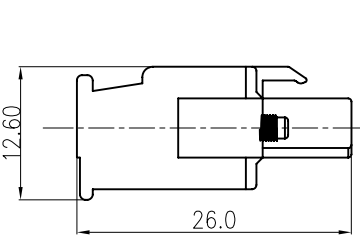

SECTION B-B

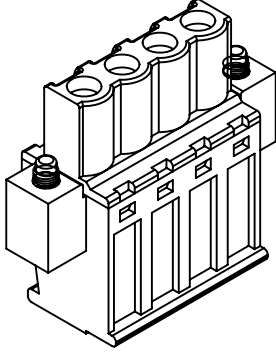

Notes:

1. Pitch:5.08mm ,Poles:2-22P
2. Rated voltage/current:UL 300V/15A
VDE 320V/10A
3. Operation temperatures:-45℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000Ω/DC1000V
6. Wire Range:28~12AWG, 2.5mm²
7. Max. Torque Value:M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm			
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7

5	2EDGKA/B-5.08 COVER	1028C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phospor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H)	XX+2	Steel	Cr ³⁺ Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing emend	CSX	04/18/06
2		工程变更	CSX	11/30/06
3		增加UL刻字	CSX	04/05/07
4		品名、料号增加环保标示“(H)”	LJH	12/11/07
5		增加VDE, CE刻字	WLM	02/12/09
6	10-0105	更新图纸	COCO	05/05/10

1	2EDGKAM/BM-5.08 HOUSING	1029A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME 2EDGKAM-5.08-XXP-1Y-00A(H)					
DRAWING NO. 2EDGKAM-5.08-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					