

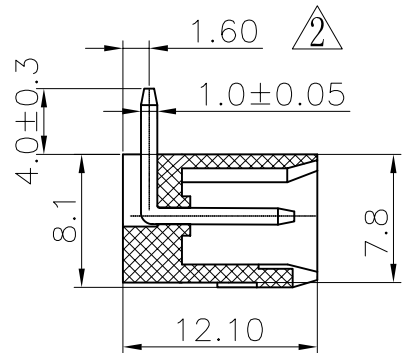

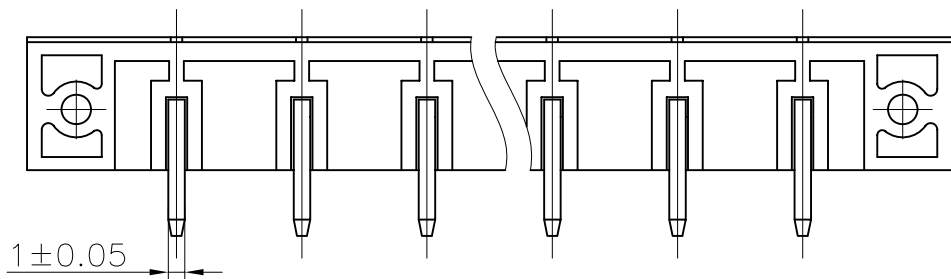


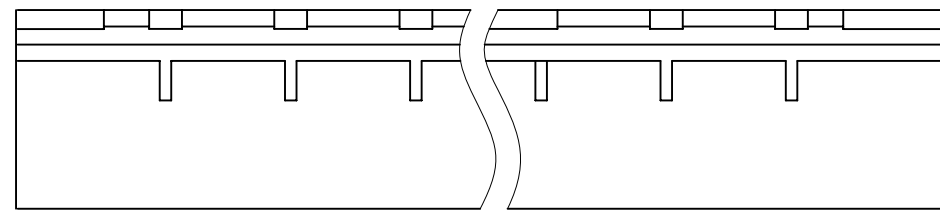

SECTION A-A

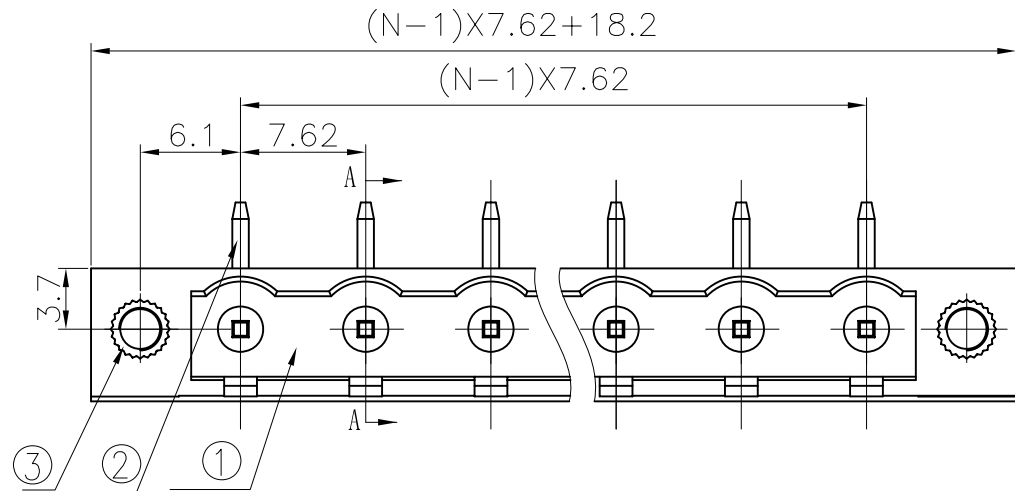

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加CE、VDE刻字	Ye.j	02/29/08
2		更新图面	LJH	04/16/08

- Notes:
1. Pitch: 7.62mm , Poles: 2-22P
 2. Rated voltage/current: UL 300V/15A
VDE 400V/15A
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	2EDGRM-7.62-Housing	1060A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTD Yangys	DATE 06/16/06"	 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±				
	.000 ±			NAME 2EDGRM-7.62-XXP-1Y-00A (H)	
	ANGLES ± 1°	G.E :		DRAWING NO. 2EDGRM-7.62-E01	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE :		DO NOT SCALE DRAWING	
				SHEET 1	OF 1

3	2EDGR(A)-Pin header(1*8.25*8.7)	1008B00040 (H)	XX	Brass	SnCe
2	2EDG-Screw cap	S000000040 (H)	2	Brass	