

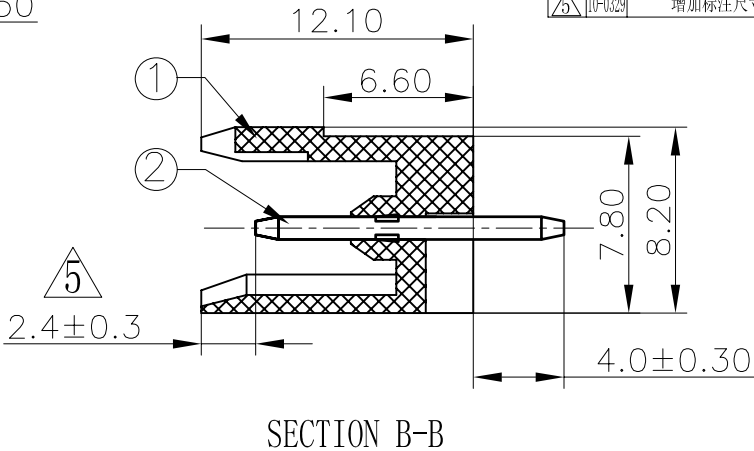


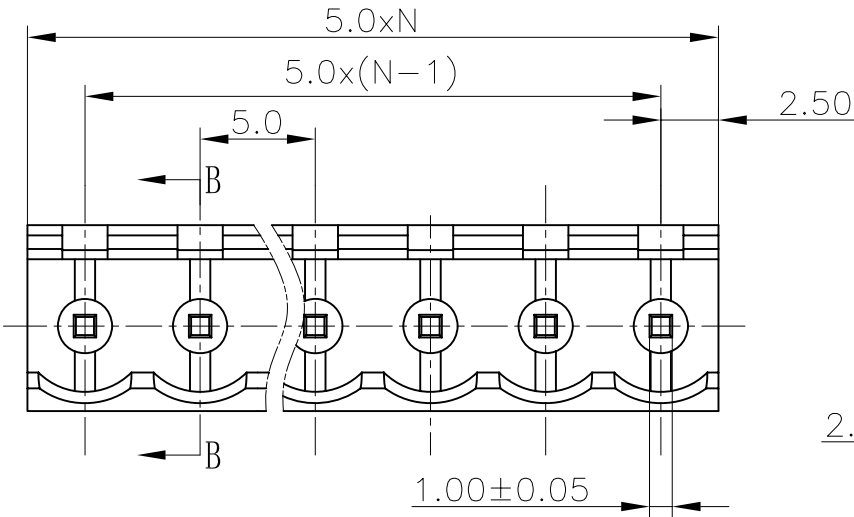

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	CSX	04/14/06
2		增加VDE, CE刻字	Ye j	02/29/08
3		增加自动化方针	WLM	09/23/08
4		修改刻字位置	WLM	12/12/08
5	10-0329	增加标注尺寸	COCO	10/06/10

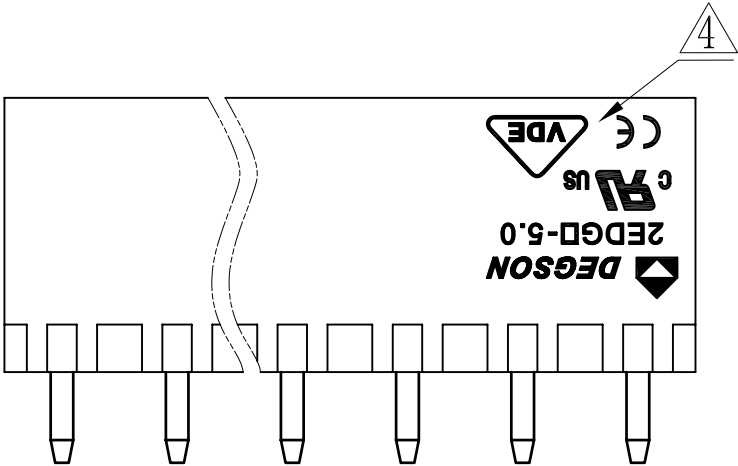

Notes:

- 1.Pitch:5.0mm, Poles:2-24P
- 2.Rated voltage/current:UL 300V/15A
VDE 320V/20A
- 3.Operation temperatures:-40° C~+105° C
- 4.Withstanding voltage: AC2000V/1Min
- 5.Insulation resistance:5000MΩ/DC1000V
- 6.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

2	2EDGV-Pin header	1007B00010 (H)	XX	Brass	Automatic assembly
2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	Manual assembly
1	2EDGV-5.0-00A (H) Housing	1018A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO DZJ	DATE 07/18/05	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM ±			NAME	
	.00 ±			2EDGV-5.0-XXP-1Y-00A (H)	
	.000 ±			DRAWING NO. 2EDGV-5.0-E02	
	ANGLES ± 1°	G.E :		/PART NO.	
	THIRD ANGLE PROJECTION	FINISH :		DO NOT SCALE DRAWING	
		SCALE : 1:1		SHEET 1 OF 1	
				SIZE A3	
				REV T5 10/06/10	