

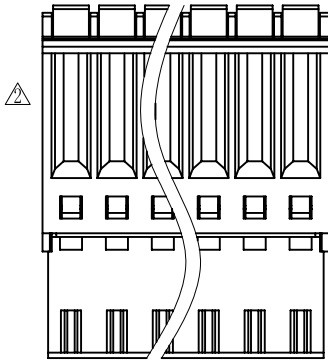
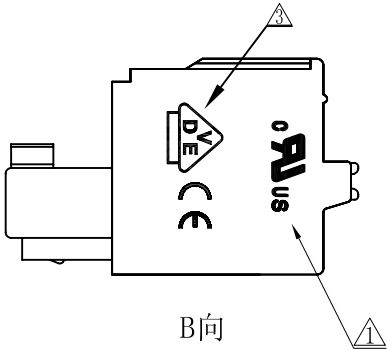
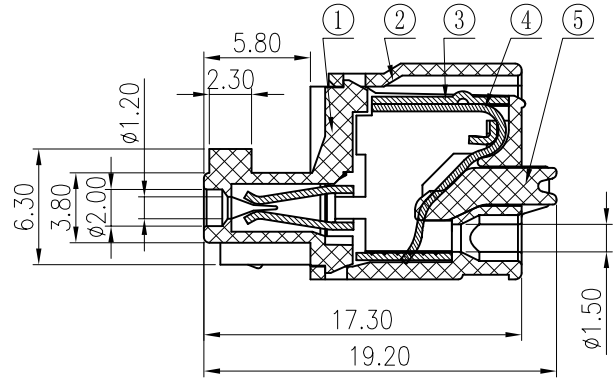


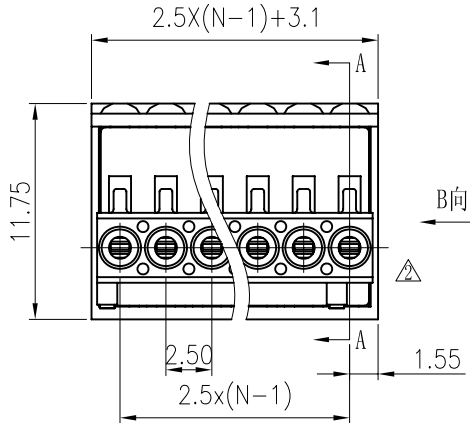


- Notes:
1. Pitch:2.5, Poles:2-12P
 2. Rated voltage/Current:UL 150V 4A Δ
VDE 250V 5A Δ
 3. Operation temperatures:-40℃~+105℃
 4. Rated impulse voltage: 1.5KV
 5. Withstanding Voltage:AC1500V/1min
 6. Insulation Resistance:5000M Ω /DC1000V
 7. Wier Range:26-20AWG, 0.2-0.5mm² Δ
 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
Δ	10-0070	增加UL刻字及参数	GHY	04/08/10
Δ	10-0287	修改外观	Jinhai.Lan	08/31/10
Δ	10-0321	增加VDE刻字及修改参数	ZXX	09/28/10


Pitch range in mm		Nominal dimension range in mm						—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

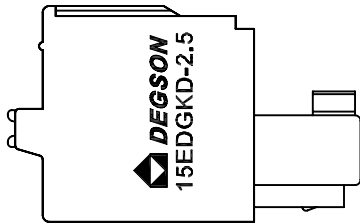

SECTION A-A



02P

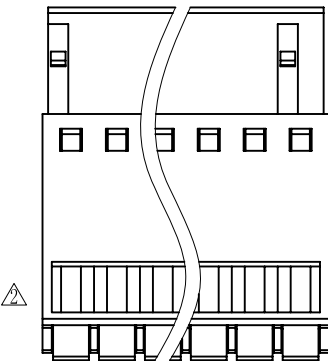

5	15EDGKD-2.5 Button	1100D05XXC (H)	XX	POM	UL94HB
4	15EDGKD-2.5 Spring	X000003900 (H)	XX	Stainless steel	
3	15EDGKD-2.5 Clamp	1100B00010 (H)	XX	Phosphor bronze	Snce
2	15EDGKD-2.5 Housing	1100A0YXXA (H)	1	PA66	UL94V-0
1	15EDGKD-2.5 Cover	1100C0YXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO LIN	DATE 10/20/08	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
MFD		DATE			
APPVL		DATE			
MATERIAL :		G.E :		NAME 15EDGKD-2.5-XXP-1Y-00A (H)	
ANGLES $\pm 1^\circ$		FINISH:		DRAWING NO. 15EDGKD-2.5-E01	SIZE A4
THIRD ANGLE PROJECTION		SCALE : 1:1		/PART NO.	REV T3 09/28/10
DO NOT SCALE DRAWING				SHEET 1	OF 1