



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△	09-0135	增加UL刻字及UL参数	GHY	12-06-09	

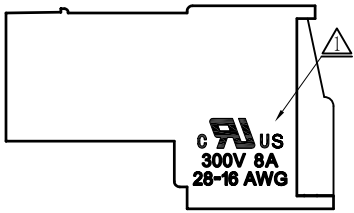





B 向




Notes:

1. Pitch: 3.81mm poles: 2-16P
2. Rated voltage/current: UL 300V/8A △
IEC 160V/8A
3. Insulation resistance: 5000MΩ/DC1000V
4. Withstanding voltage: AC2000V/1Min
5. Wire range: 28-16AWG 1.5mm²
6. Temp. Range: -40° C~+105° C
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7
							0.05/10

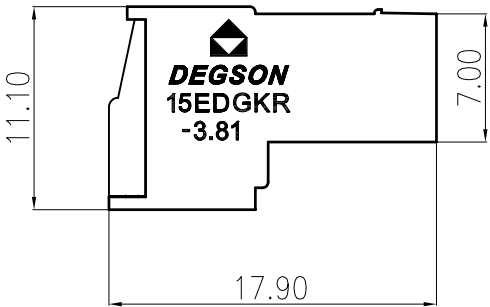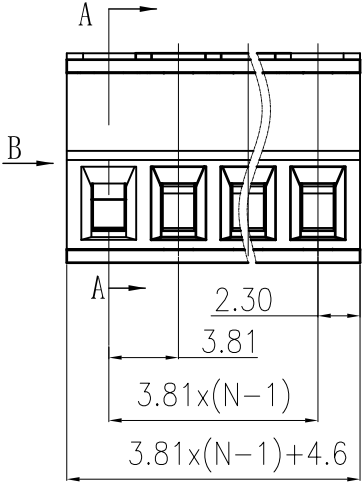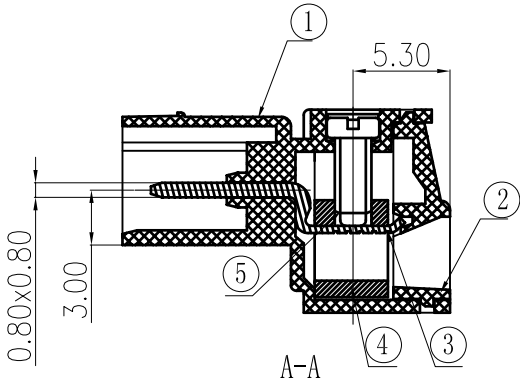

3	15EDGKR-Pin	1215B00010 (H)	XX	Copper	SnCe plated		
2	15EDGK-3.81-Cover	1010COYXXA (H)	1	PA66	UL94V-0		
1	15EDGKR-3.81-Housing	1215A0YXXA (H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES		
DETACHED LISTS	← MM (INCH) →		DFTO Zhuwm		DATE 12/14/07*		
	TOLERANCES EXCEPT AS NOTED		CHKD				
			MFO		DATE		
			APPVL		DATE		
	MM		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD				
	.0 ±						±
	.00 ±						±
	.000 ±						±
	ANGLES ± 1°		G.E :		NAME 15EDGKR-3.81-XXP-1Y-00A (H)		
			FINISH :				
SCALE : 1:1							
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET 1	OF 1		
				A3	REV T1 12/06/09*		

5	15EDG-“”Screws	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
4	15EDG-Brass cage	X000000010 (H)	XX	Brass	Ni plated