
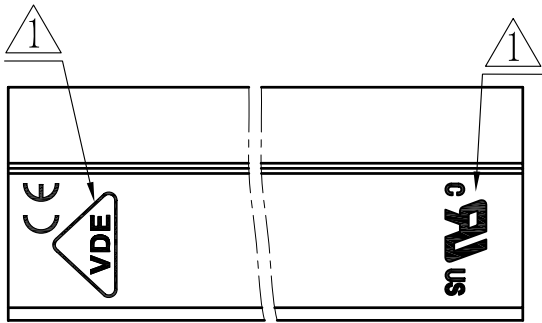
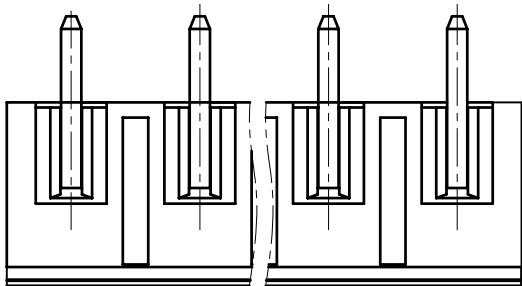
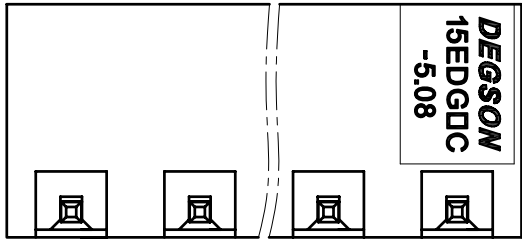
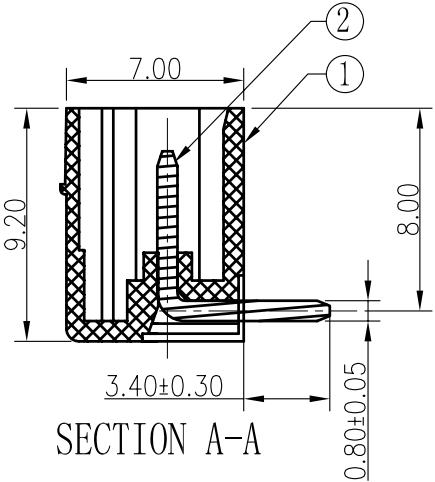


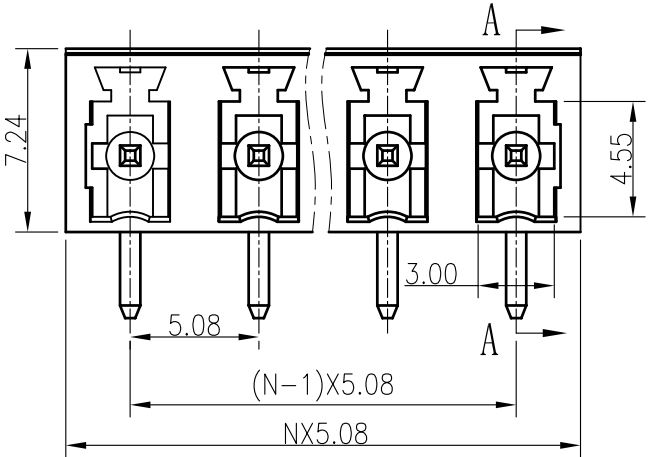

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加VDE, UL, CE刻字	Zengy	01/13/09

- Notes:
1. Pitch: 5.08mm, Poles: 2-12P
 2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

2	15EDGR(0.8*12.6R) Pin header	1003B00010(H)	XX	Brass	SnCe plated
1	15EDGRC-5.08-Housing	1172A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO: Zhuwm	DATE 12/14/07	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
MATERIAL :		NAME		15EDGRC-5.08-XXP-1Y-00A(H)	
ANGLES ± 1°		G.E :		DRAWING NO. 15EDGRC-5.08-E01	SIZE A3
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	REV T1 01/13/09
		SCALE : 1:1		DO NOT SCALE DRAWING	SHEET 1 OF 1