

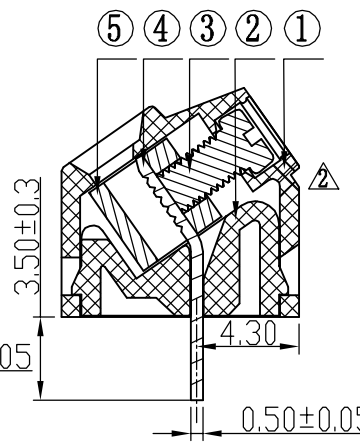
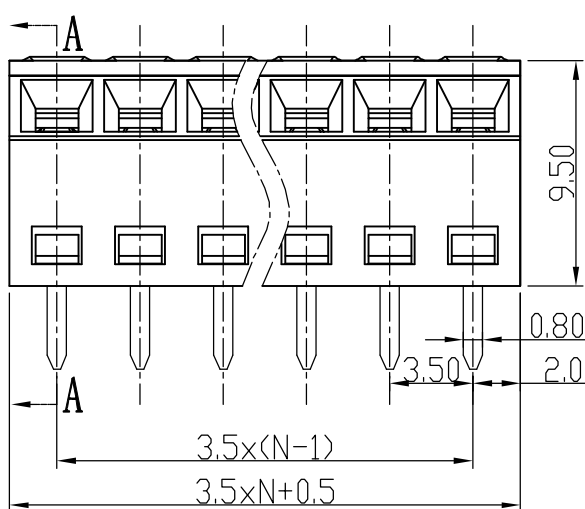

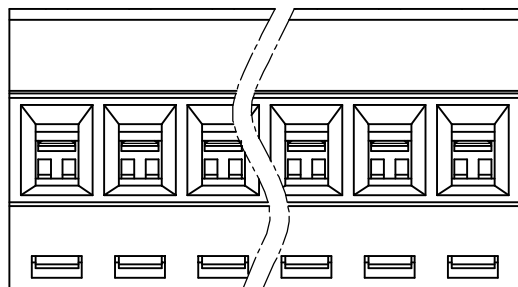


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
⚠	10-0152	增加UL刻字	Lasting	23/05/10
⚠	10-0279	避专利修改外观	PwngWu	08/30/10

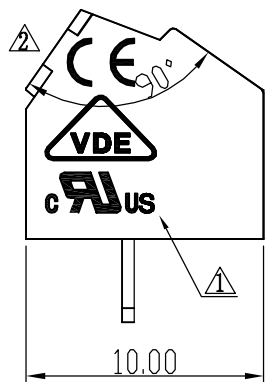

- Notes:
1. Pitch: 3.5mm , Poles: 2-16P
 2. Rated voltage/current: UL 300V/10A
IEC 130V/10A
 3. Operation temperatures: -40℃ ~ +105℃
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 26~16AWG, 1.0mm²
 7. Max. Torque Value: M2, 2.04kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

5	DG381 Cage	X000000300 (H)	XX	Brass	Ni plated
4	DG381S-3.5 Pin header	4147B00010 (H)	XX	Copper	SnCe
3	DG381 Screws	S000001440 (H)	XX	Steel	Cr ³⁺ Zn
2	DG381S-3.5-Cover	4147C0YXXA (H)	1	PA66	UL94V-0

1	DG381S-3.5-Housing	4147A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 10/24/08*	CHKD	DATE	
MFD		DATE	APPVL	DATE	
MATERIAL :		NAME			
ANGLES ± 1°		G.E. :			
THIRD ANGLE PROJECTION		FINISH:			
SCALE : 1:1		DD NOT SCALE DRAWING			
		DRAWING NO. DG381S-3.5-E01		SIZE	REV
		/PART NO.		A3	T2
		SHEET 1		OF 1	