


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
2		Drawing Revise	Haoyh	06/27/06
3		??VDE?CE??	LJH	11/12/07
4		修改焊脚厚度尺寸	LJH	05/17/08

Notes:

1. Pitch:3.5mm , Poles:2-24P
2. Rated voltage/current:UL 150V/10A
VDE 130V/10A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wire Range:26~16AWG, 1.0mm²
7. Max. Torque Value:M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
						±1.0
						0.05/10

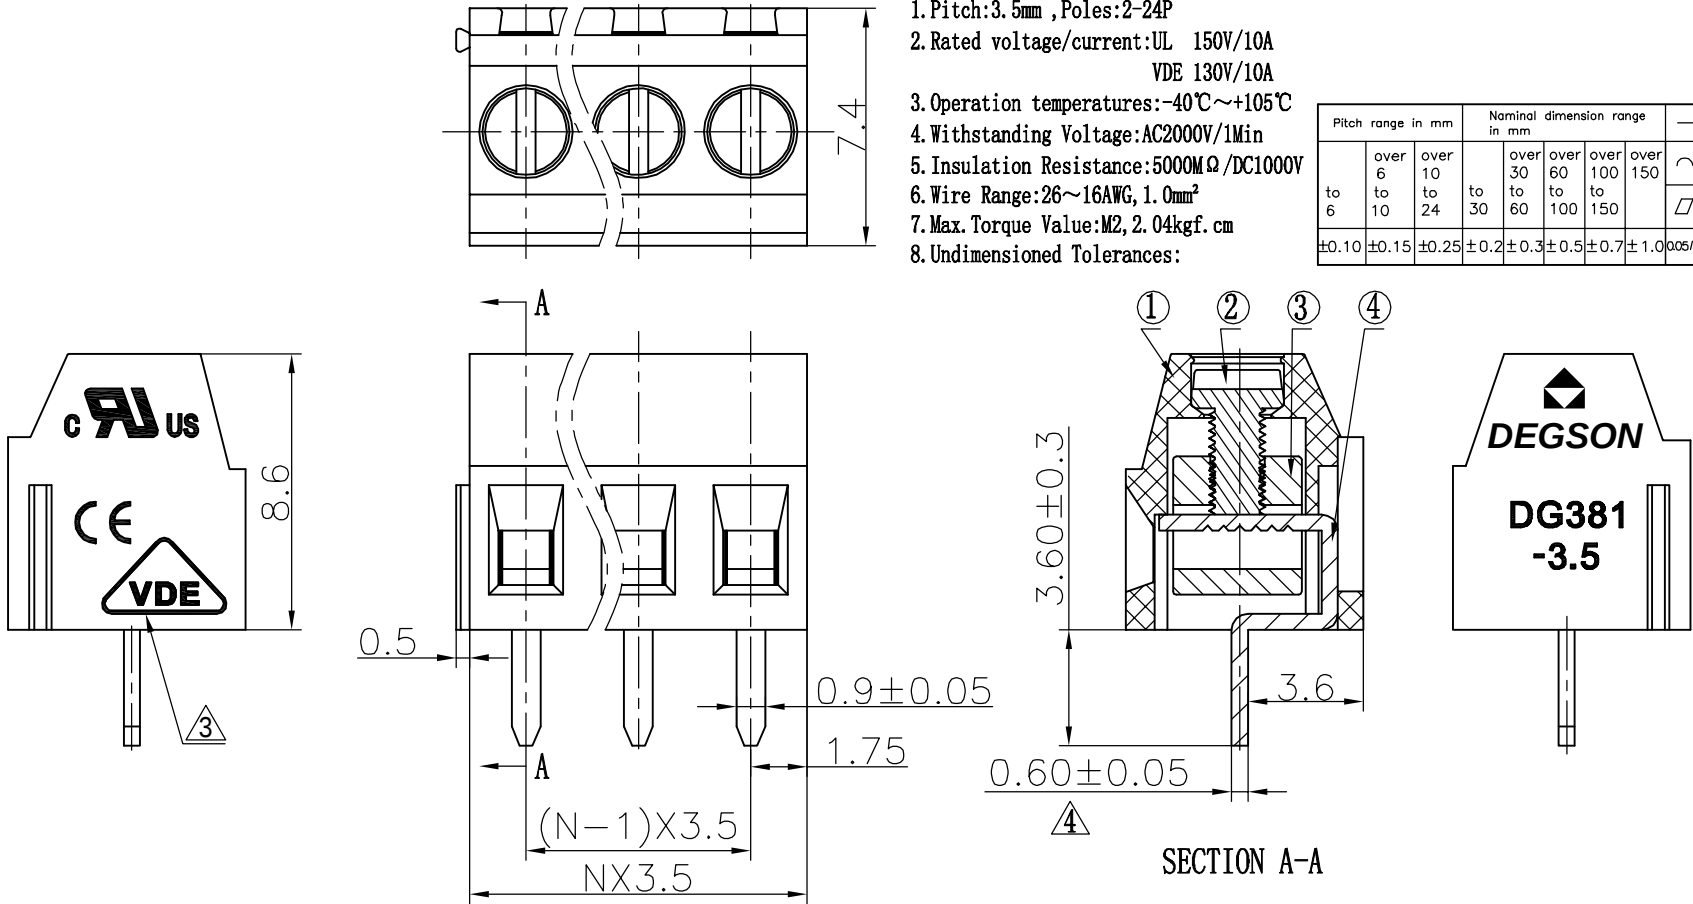

1	DG381-3.5-Housing	4032A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTD Haoyh	DATE 05/16/05	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
MFO		DATE			
APPVL		DATE			
MATERIAL :		NAME		DG381-3.5-XXP-1Y-00A(H)	
ANGLES ± 1°		G.E :		DRAWING NO. DG381-3.5-E02	
FINISH :		/PART NO.		SIZE A3	
THIRD ANGLE PROJECTION		SCALE :		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	

4	DG381 Pin header	4047B00010 (H)	XX	Phosphor bronze	SnCe
3	DG381 Cage	X000000300 (H)	XX	Brass	Ni plated
2	DG381 Screws	S000001440 (H)	XX	Steel	Cr ³⁺ Zn