

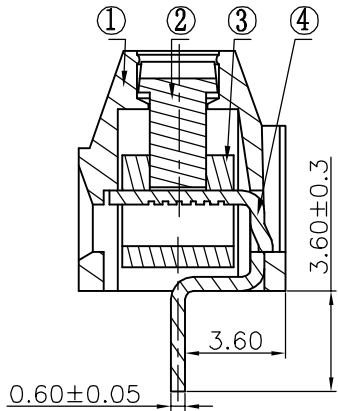
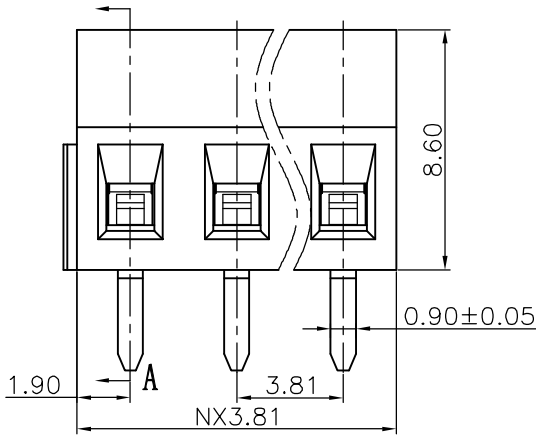
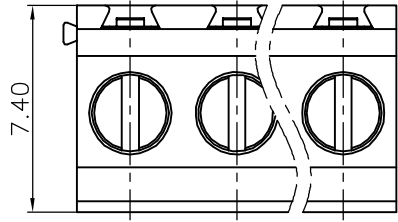


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		Drawing Revise	Haoyh	05/12/06	
△		增加VDE、CE标志	LJH	11/13/07	


Notes:

1. Pitch:3.81mm , Poles:2-XXP
2. Rated voltage/current:UL 300V/10A
VDE 130V/10A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:16~26AWG, 1.0mm²
7. Max. Torque Value:M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ □
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



SECTION A-A



4	DG381 Pin header	4047B00010 (H)	XX	Phosphor bronze	SnCe
3	DG381 Cage	X000000300 (H)	XX	Brass	Ni plated
2	DG381 Screw	△S000001440 (H)	XX	Steel	Cr ³⁺ Zn

1	DG381-3.81-Housing	4047A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO ZHUWM	DATE 02/17/05	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG381-3.81-XXP-1Y-00A(H) DRAWING NO. DG381-3.81-E02 /PART NO. DO NOT SCALE DRAWING	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	ANGLES ± 1°	G.E :		
		THIRD ANGLE PROJECTION	FINISH :		
			SCALE : 1:1		
				SHEET 1	OF 1