

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 3A(01P),
300V / 3A(02P/03P)

2.Wire range : 26~22AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	160V	160V	32V
Rate current(A)	3A		

2.Wire range : 0.14~0.34mm²(SOL)

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 3.00mm, Poles : N=01~03P

3.Stripping length : 5.5~6.5mm

4.Operating temperature: -40°C~+130°C


5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				0.1/10 <	±2°
TO	Over	Over	TO	Over	Over	Over		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

DG2001 - 3.0 - XXP - 1Y - 01A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
3.(Black)

(RoHS)
01A-(Customer request)

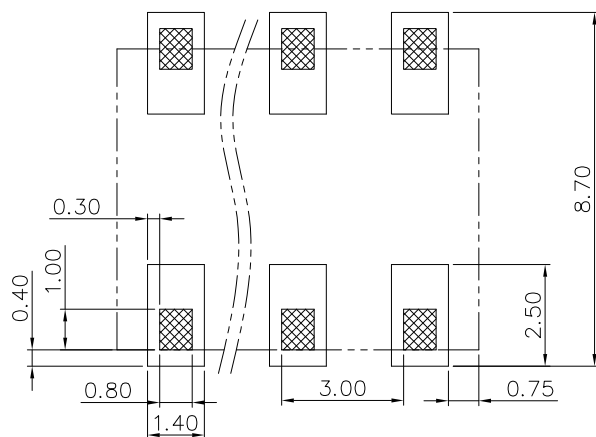

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/			NAME: DG2001-3.0-XXP-1Y-01A(H)		
	CHKD:	/			TITLE: CUSTOMER DRAWING		
	DRFT:	/			DRAWING NO.: /		REV
	THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		SCALE	1:1