
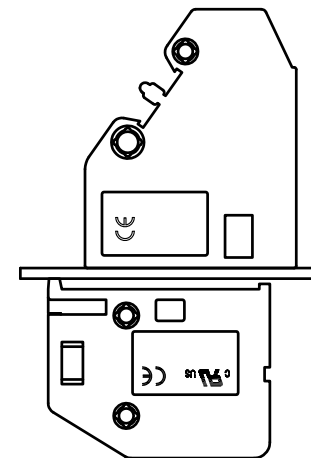
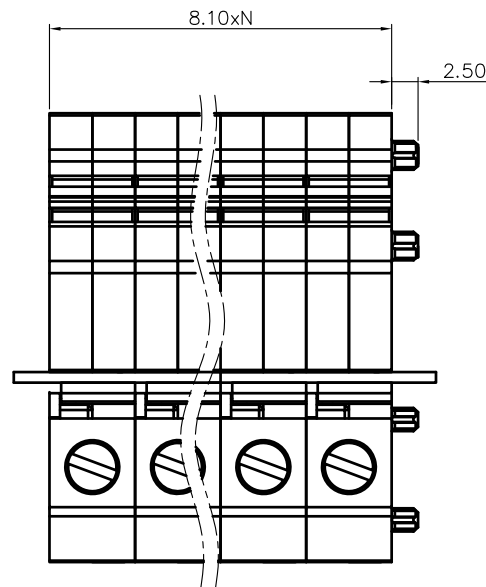


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

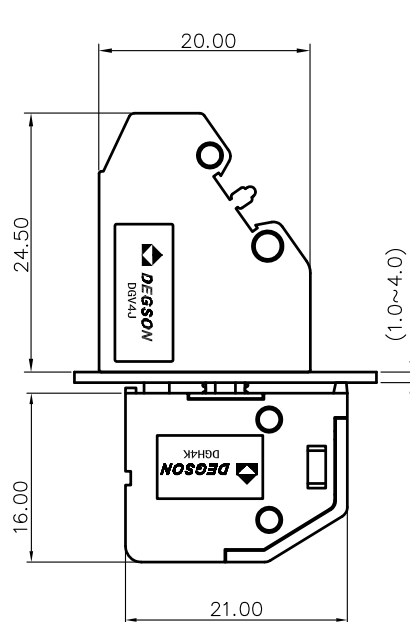

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 30A
- 2.Torque Value : M3.0 , 4.43Lb.in
- 3.Wire Range : 30~10AWG

IEC Standard

- 1.Rated Voltage/Current : 400V / 41A
- 2.Torque Value : M3 , 0.5N.m
- 3.Wire Range : 0.2~6mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.1mm, Poles : N=01P~XXP
- 3.Stripping length : 9.0mm
- 4.Withstanding Voltage : AC2500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

7.RoHS Compliance

DGV4 - XXP - 1Y - 10A (H)
(RoHS)
10A-(Customer Request)
(Series No.)(Poles)(Single Pitch)(Color):1.(Grey) 2.(Blue) 3.(Black)
4.(Green) 5.(Orange) 6.(Red)
7.(Transparent) 8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DGV4-XXP-1Y-10A(H)			
	CHKD:	/							
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
			THIRD ANGLE PROJECTION			DRAWING NO.: /		SHEET	1/1

MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1
-----------	--	----------------------	--	-------	-----