



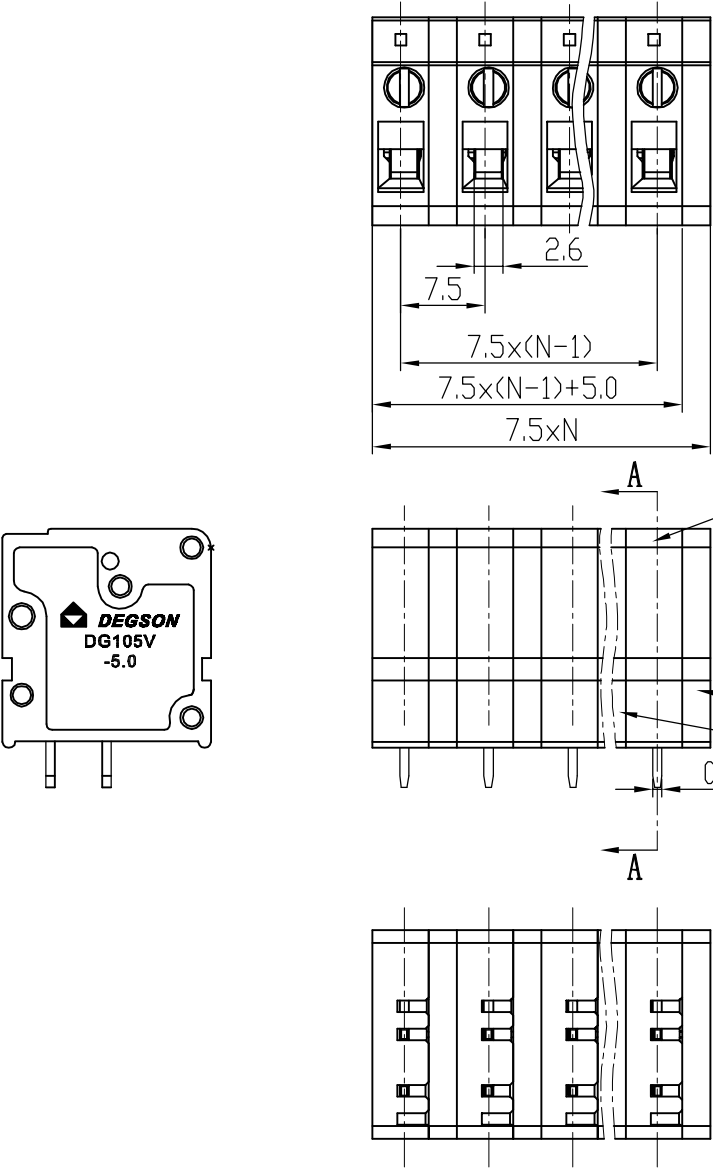

- Notes:
- 1. Pitch:7.5mm , Poles:1-XXP
 - 2. Rated voltage/current:UL 300V/12A
VDE 250V/24A
 - 3. Operation temperatures:-40℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:24~14AWG, 0.5~2.5mm²
 - 7. Max. Torque Value:M2.5, 4.08Kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150		∅
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

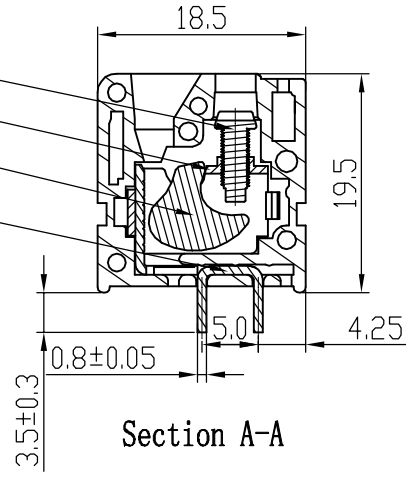

7	DG105V-Calpboard	4063H0Y01A (H)	XX-1	PA66	UL94V-0
6	DG105V-Cover	4063C0Y01A (H)	1	PA66	UL94V-0
5	DG105V-5.0-Pin header	4063B00010 (H)	XX	Copper	SnCe plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr ³⁺ Zn

3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr ³⁺ Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr ³⁺ Zn
1	DG105V-5.0	4063A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DATE 10/07/08 CHKD MFD DATE DATE DATE MATERIAL G.E FINISH SCALE : 1:1 NAME DG105V-7.5-XXP-1Y-00A (H) DRAWING NO. DG105V-7.5-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1					
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD SIZE A3 REV T1 07/11/08					