

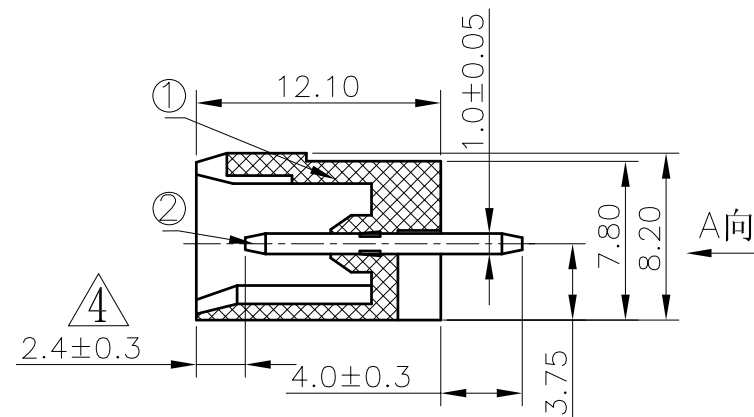



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	WF	02/22/06*
△		Drawing emend	CSX	04/24/06*
△		增加VDE、CE刻字	YeJ	02/28/08*
△	10-0329	增加标注尺寸	COCO	10/07/10*

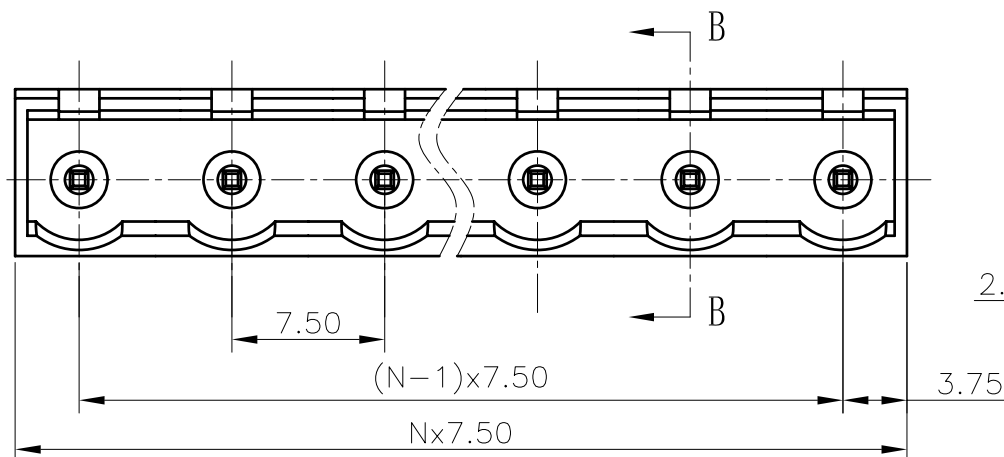

SECTION B-B

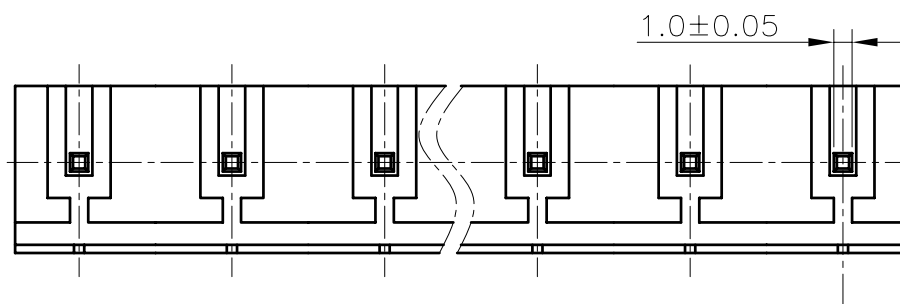

VIEW A

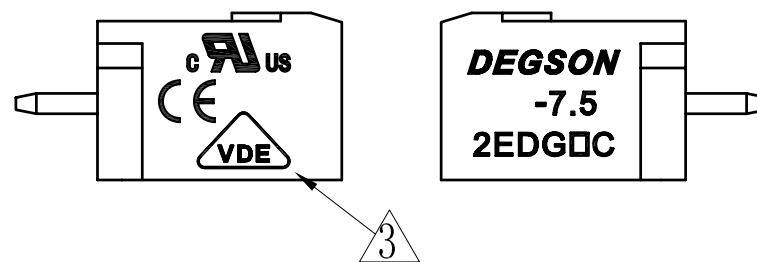

Notes:

- Pitch: 7.5mm
- Rated voltage/current:UL 300V/15A
VDE 400V/20A
- Withstanding voltage: AC2000V/1Min
- Insulation resistance:5000MΩ/DC1000V
- Operation temperatures:-40° C~+105° C
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

2	2EDGV Pin header	1007B00030 (H)	XX	Brass	SnCe		
1	2EDGVC-7.5-Housing	1022A0YXXA (H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES		
DETACHED LISTS	MM (INCH) TOLERANCES EXCEPT AS NOTED		 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD				
	MM .0 ± .00 ± .000 ±					OFTO HAOYH CHKD MFO APPLV	DATE 10/07/05 DATE DATE DATE
	± ± ±					MATERIAL :	
	ANGLES ± 1°					G.E :	
	 THIRD ANGLE PROJECTION		NAME 2EDGVC-7.5-XXP-1Y-00A(H)				
	SCALE : 1:1		DRAWING NO. 2EDGVC-7.5-E02 /PART NO.				
			DO NOT SCALE DRAWING				
			SHEET 1 OF 1				
			SIZE A3 REV T4 10/07/10*				