
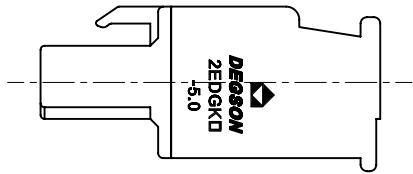
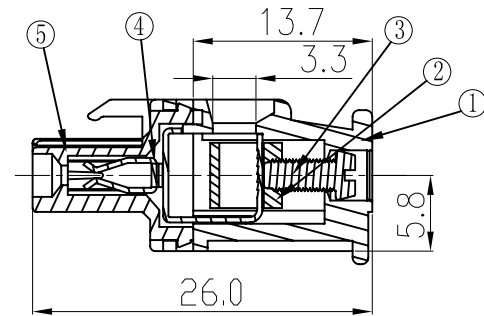
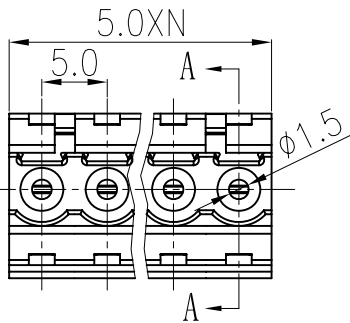
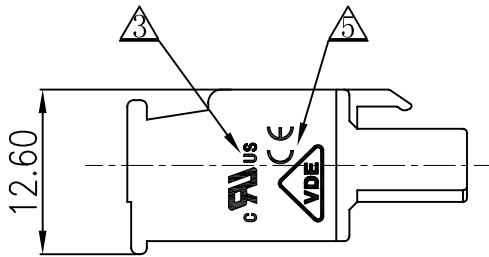
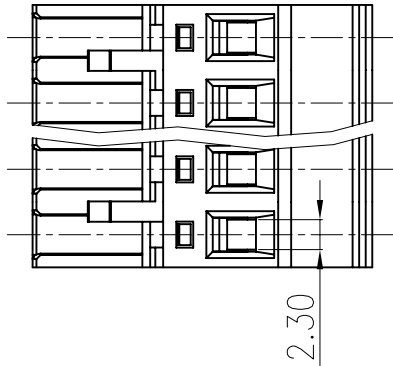


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	CSX	04/18/06
△		工程变更	CSX	11/30/06
△		增加UL刻字	CSX	03/12/07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE、CE刻字	WLM	02/10/09

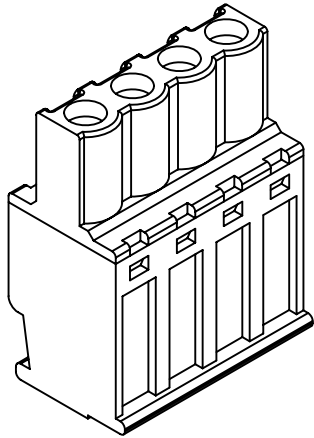

Section A-A

Notes:

- Pitch:5.0mm ,Poles:2-24P
- Rated voltage/current:UL 300V/15A
VDE 320V/10A
- Operation temperatures:-45℃~+105℃
- Withstanding Voltage:AC2000V/1min
- Insulation Resistance:5000Ω/DC1000V
- Wire Range:28~12AWG, 2.5mm²
- Max. Torque Value:M2. 5, 4. 08kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6	10	30	60	100	150		—
to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

5	2EDGKA/B-5.0 COVER	1030C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phoshor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H)△	XX	Steel	Cr ³⁺ Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated
1	2EDGKA/B-5.0 HOUSING	1030A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO WYP	DATE 04/22/04"
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE
	MM	MFO	DATE
	.0 ±	APPL	DATE
	.00 ±		
	.000 ±		
	ANGLES ± 1°	G.E :	
	THIRD ANGLE PROJECTION	FINISH :	
		SCALE :	
NAME		SIZE	REV
2EDGKA-5.0-XXP-1Y-00A(H)		A3	T5
DRAWING NO. 2EDGKA-5.0-E01		02/10/09"	
/PART NO.			
DO NOT SCALE DRAWING			SHEET 1 OF 1