
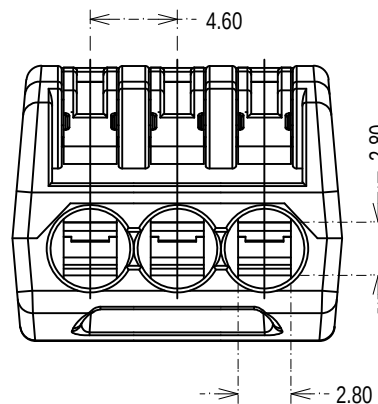
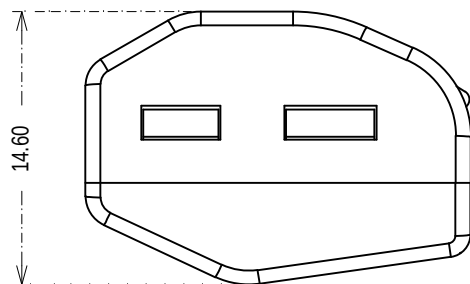
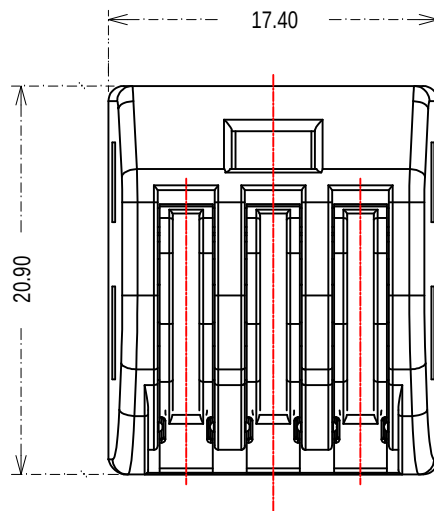


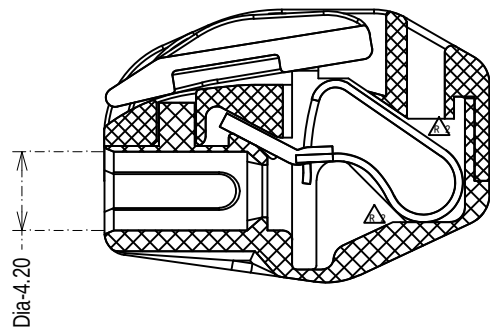

Notes:

1. Electrical Characteristics:

- 1 Contact Resistance: 20mΩ Max
- 2 Dielectric Withstanding Voltage: 2500V AC(rms) for 1 Minute
- 3 Insulation Resistance: 1000mΩ Min
- 4 Current Rating: 32A
- 5 Voltage Rating: 450V AC rms

2. Environment Characteristics:

- 1 Temperature: -40°C ~ +105°C

3. Materials:

- 3.1 Contact Materials: Stainless Steel
- 3.2 Contact Plating: Electrolytic Copper Nickeltin
- 3.3 Insulator Materials: PA66 + 5%GF, UL94V-0

4. Machaniical Properties:

- 4.1 Wire range: 24--12AWG / 0.75~2.5mm
- 4.2 Strip Length: 8 ~ 9 mm

GOSUN Terminals & Connectors

GENERAL TOLERANCE

X* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: 黄 语 惠

DATE: 2018.05.02

DWG. NO.:

YH-GSL034-001A-003

TITLE:

4.60mm Spring Type, Lighting connector

REV.:
01

UNIT.:
mm

SCALE.:
1:1

PAGE.:
1/1



CHECK: 忠 诚

DATE: 2018.05.18

PART NO.:

GSL034-03P

AUDIT: 忠 诚

DATE: 2018.05.18

APPROVE: 忠 诚

DATE: 2018.05.18