

1 2 3 4 5 6 7 8 9

F


E

D



C

B


A

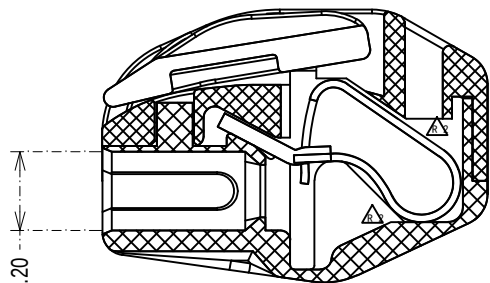

Dia-4.20

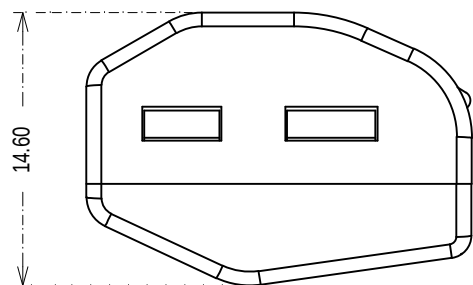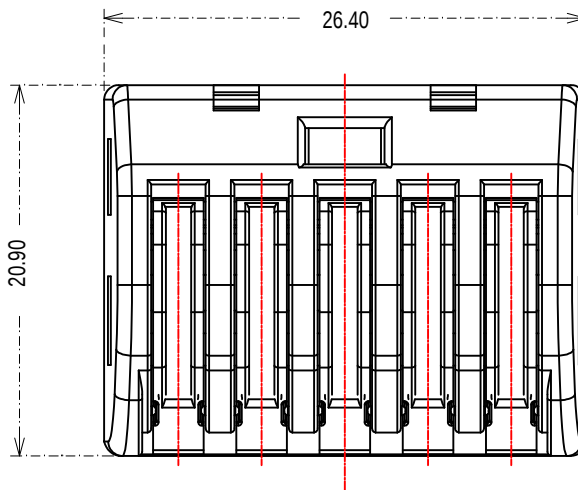

14.60

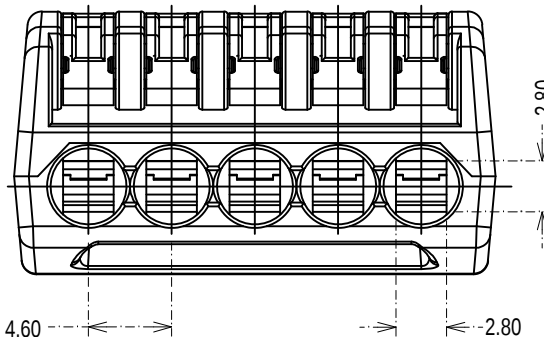

4.60

2.80

2.80

Notes:

1. Electrical Characteristics:
 - 1.1 Contact Resistance: 20mΩ Max
 - 1.2 Dielectric Withstanding Voltage: 2500V AC(rms) for 1 Minute
 - 1.3 Insulation Resistance: 1000mΩ Min
 - 1.4 Current Rating: 32A
 - 1.5 Voltage Rating: 450V AC rms
2. Environment Characteristics:
 - 2.1 Temperature: -40°C ~ +105°C
3. Materials:
 - 3.1 Contact Materials: Stainless Steel
 - 3.2 Contact Plating: Electrolytic Copper Nickeltin
 - 3.3 Insulator Materials: PA66 + 5%GF , UL94V-0
4. Machaniical Properties:
 - 4.1 Wire range: 24--12AWG / 0.75~2.5mm
 - 4.2 Strip Length: 8 ~ 9 mm

GOSUN Terminals & Connectors

GENERAL TOLERANCE

X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: 黄 语 惠

CHECK: 忠 诚

AUDIT: 忠 诚

APPROVE: 忠 诚

DATE: 2018.05.02

DATE: 2018.05.18

DATE: 2018.05.18

DATE: 2018.05.18

DWG. NO.:

YH-GSL034-001A-004

PART NO.:

GSL034-05P

TITLE:

4.60mm Spring Type, Lighting connector

REV.: 01	UNIT.: mm	SCALE.: 1:1	PAGE.: 1/1	
----------	-----------	-------------	------------	--

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A