

Metric	PG	Claping range(Ø)	SW	GL	Type
	Pg7	3-6.5	15	8.5	DDL-PG7P
	Pg9	4-8	19	8.0	DDL-PG9P
	Pg11	5-10	22	8.0	DDL-PG11P
	Pg13.5	6-12	24	10.0	DDL-PG13.5P
	Pg16	8-14	27	10.0	DDL-PG16P
	Pg21	13-18	33	11	DDL-PG21P
	Pg29	18-25	42	11	DDL-PG29P
	Pg36	22-32	52	13	DDL-PG36P
	Pg42	31-38	60	15	DDL-PG42P
	Pg48	37-44	65	14	DDL-PG48P
M12x1.5		3-6.5	15	8	DDL-M12P
M16x1.5		4-8	19	8	DDL-M20P
M20x1.5		6-12	24	9	DDL-M20P
M25x1.5		13-18	33	11	DDL-M25P
M32x1.5		18-25	42	11	DDL-M32P
M40x1.5		22-32	51	13	DDL-M40P
M50x1.5		31-38	60	13	DDL-M50P
M63x1.5		37-44	65	14	DDL-M63P

Plastics Cable gland

Material:Nylon

Colour:black or grey

Seal Material:NBR



Degree of protection:IP68


Press seal material:PA

Temperature range:-40~100℃

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

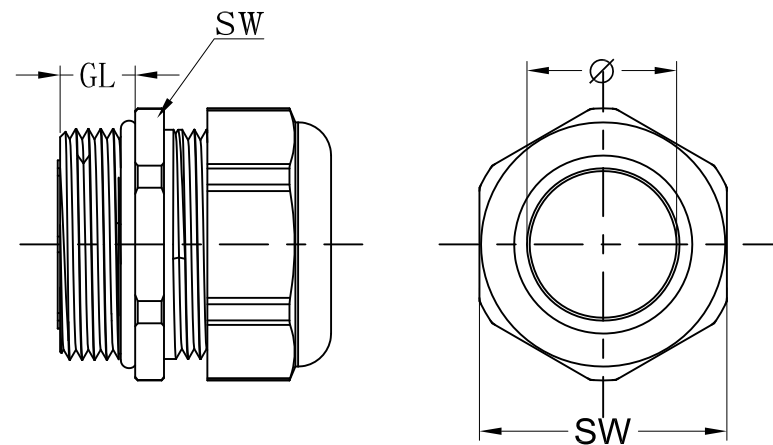

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:		NAME:	
	CHKD:		Plastics Cable gland	
	DRFT: 2016.09.22		TITLE: CUSTOMER DRAWING	
	 THIRD ANGLE PROJECTION		DRAWING NO.: MM (INCH) DO NOT SCALE DRAWING	
		REV	D0-1	
		SHEET	1/1	
		SCALE		