
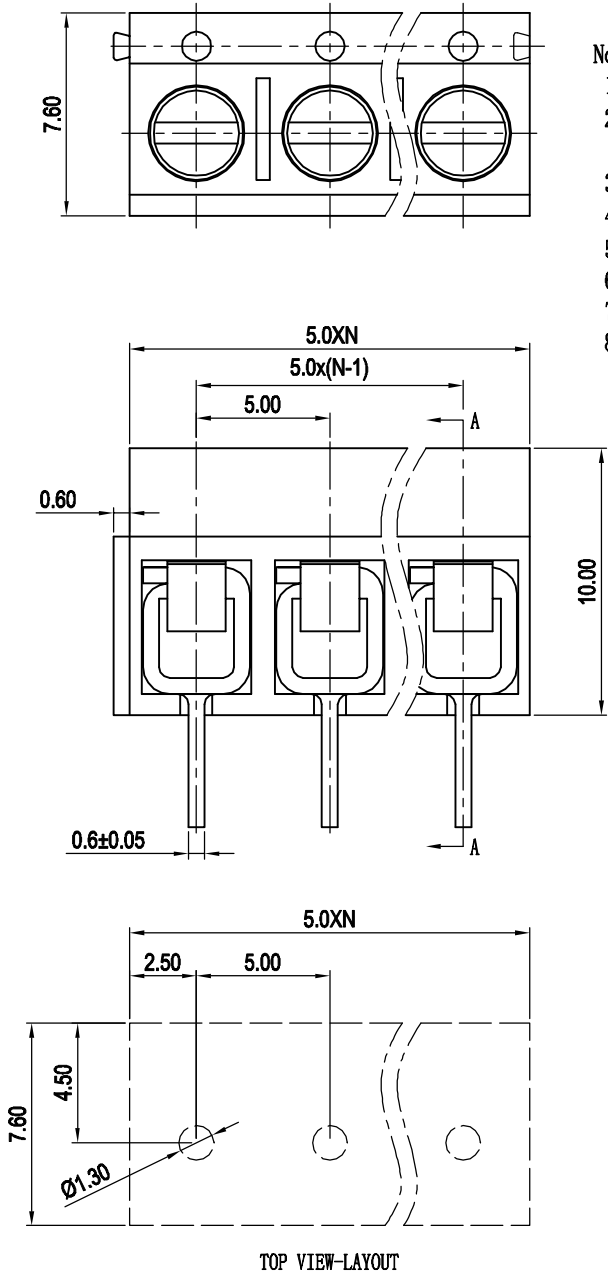
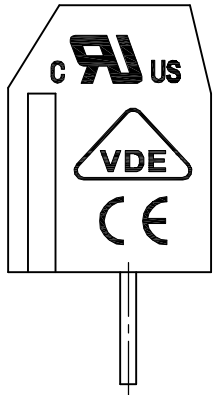




- Notes:
1. Pitch: 5.0mm, Poles: 2-XXP
 2. Rated voltage/current: UL 300V/10A
VDE 250V/15A
 3. Operation temperatures: -30°C ~ +120°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000M Ω /DC1000V
 6. Wire Range: 22~14AWG, 1.5mm² Δ
 7. Max. Torque Value: M2.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
Δ		Drawing Revise	Haoyh	03/28/06
Δ		增加VDE、CE标志	LJH	12/03/07
Δ		修改参数	LJH	03/18/09

4	DG306-pin header	4006B00020 (H)	XX	Brass	SnCe	
3	DG301-Screws	S000001420 (H)	XX	Steel	Cr ³⁺ Zn	
2	DG306-Spring	X000000160 (H)	XX	Stainless steel		
1	DG306-5.0-Housing	4006A0YXXA (H)	1	PBT	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	 MM (INCH)		DFTO Zhwm		DATE 07/17/04	
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE	
			MFO		DATE	
			APPVL		DATE	
			MATERIAL :			
	ANGLES ± 1°		G.E :			
			FINISH :			
	THIRD ANGLE PROJECTION		SCALE : 1:1			
			DO NOT SCALE DRAWING			
			SHEET 1		OF 1	
 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG306-5.0-XXP-1Y-00A(H) DRAWING NO. DG306-5.0-E06 /PART NO. SIZE A3 REV T3 03/18/09						