

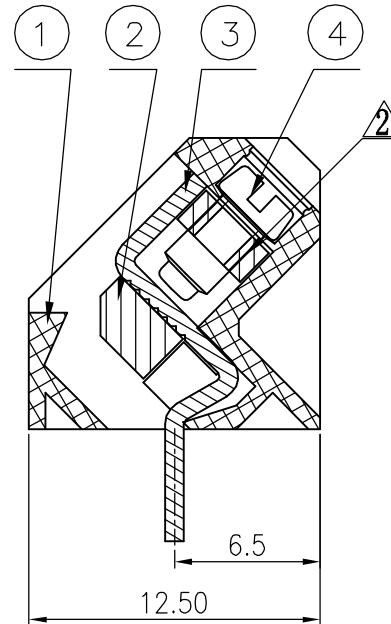
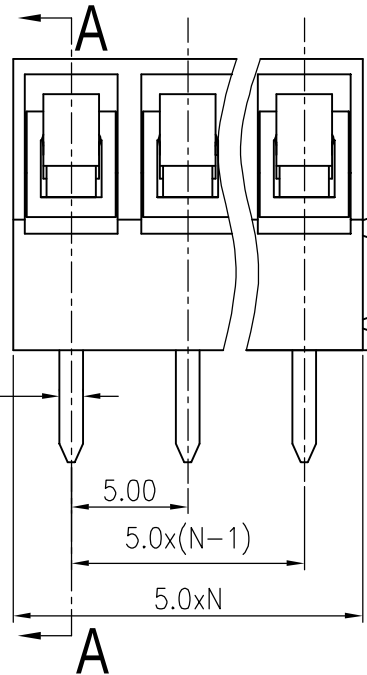


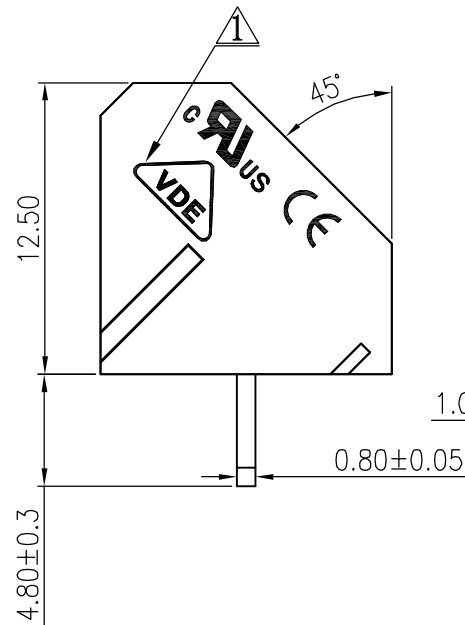

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加VDE、CE标志	LJH	12/26/07
△		图面更新	WLM	08/02/08
△	10-0019	螺絲料号由S00000400变更为S00000300	COCO	09/27/10

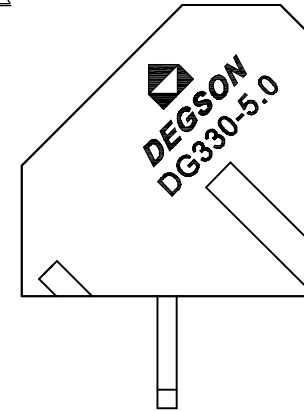

- Notes:
1. Pitch: 5.0mm, Poles: 2-XXP
 2. Rated voltage/current: UL 300V/15A
VDE 250V/24A
 3. Operation temperatures: -40° C ~ +105° C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 22-12AWG, 2.5mm²
 7. Max. Torque Value: M2.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6	over 10		over 30	over 60	over 100	over 150			
to 6	to 10	to 24	to 30	to 60	to 100	to 150				
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

4	DG330 "—" Screw	S000005330(H)	XX	Steel	Cr ³⁺ Zn
3	DG330-Pin header	4011B00010(H)	XX	Brass	SnCe plated
2	DG330-Cage	X000000330(H)	XX	Brass	Ni plated
1	DG330-5.0-Housing	4011A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETAILED LISTS	MM (INCH)	DFTO ZYH	DATE 08/18/07	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±			NAME	
	.000 ±			DG330-5.0-XXP-1Y-00A(H)	
	ANGLES ± 1°	G.E :		DRAWING NO. DG330-5.0-E02	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	