
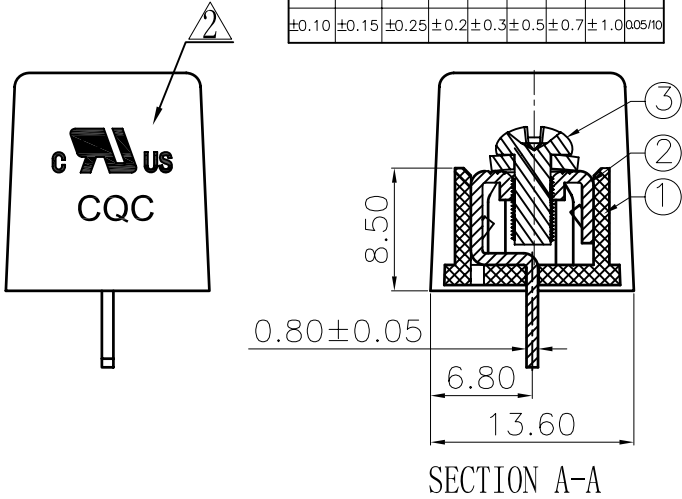


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面整理	CSX	12/23/05
2		增加UL刻字	CSX	06/05/06
3		修改脚宽	CSX	09/21/06
4		工程变更:品名商标更改到侧面	WLM	07/19/08

- NOTES:
- Pitch:8.25mm ,Poles:2P-26P
 - Rated voltage/current: UL 300V/20A
IEC 450V/32A
 - Operation temperatures: -40° C ~+105° C
 - Withstanding Voltage: AC2000V/1Min
 - Insulation Resistance: 500MΩ /DC500V
 - Wire Range: 22-12AWG, 4.0mm²
 - Max. Torque Value: M3, 5.10Kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
to 6	to 10	to 24	to 60	to 100	to 150	to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

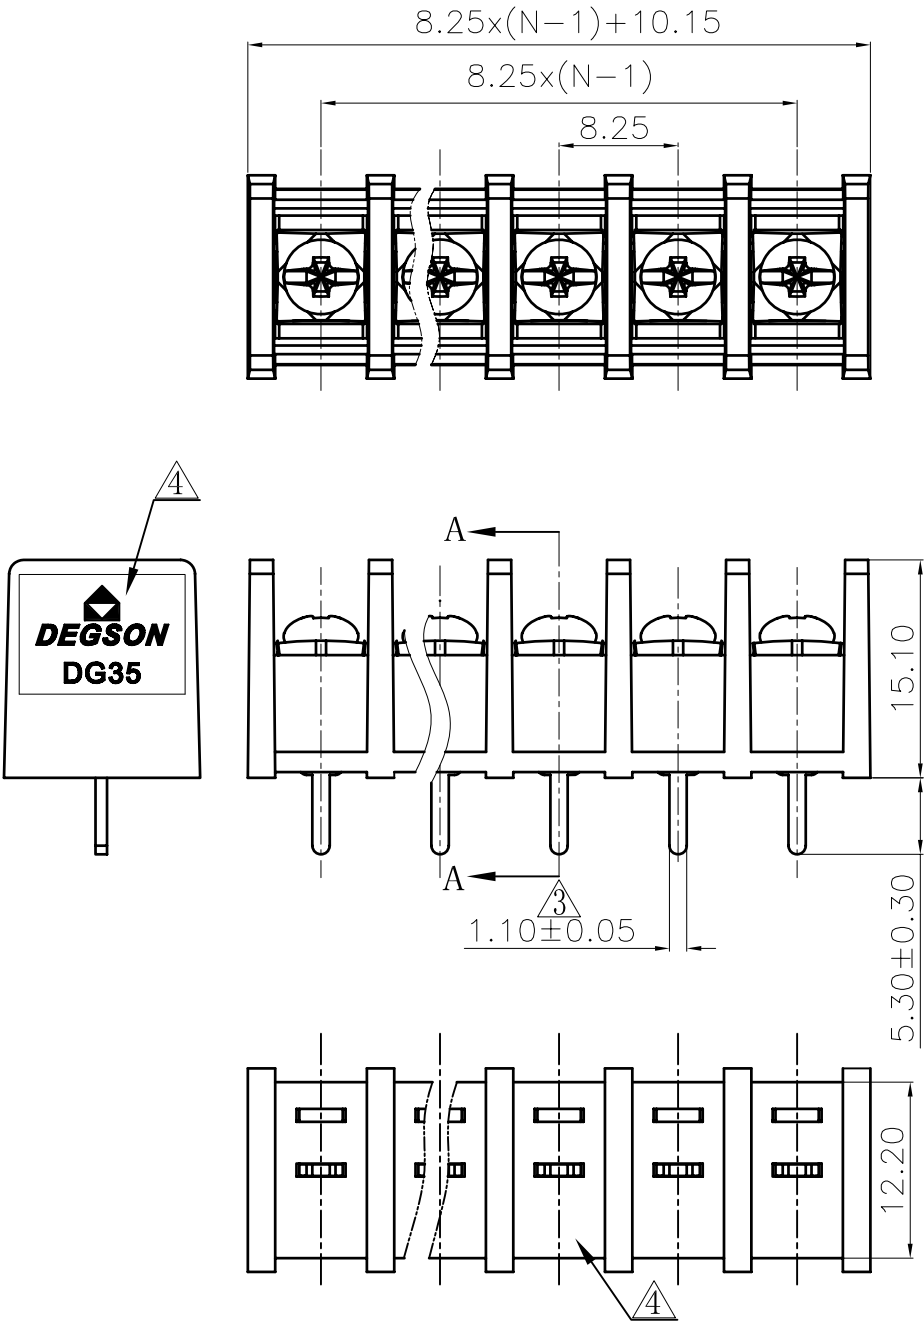

3	3*6(6*6) bright-Screw	S000000450(H)	XX	Steel	Ni Plated	
2	DG25C-Pin Header	5001B00010(H)	XX	Brass	SnCe	
1	DG35C-B-Housing	5002A0YXXA(H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO DZJ	DATE 10/25/05*		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MATERIAL :					
	ANGLES ± 1°		G.E :			
	FINISH :		DRAWING NO. DG35C-E07			
			/PART NO.			
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING	SHEET 1 OF 1
NAME						
DG35C-B-XXP-1Y-00A(H)						
DEGSN® 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD						
SIZE A3 REV T4 07/19/08*						