
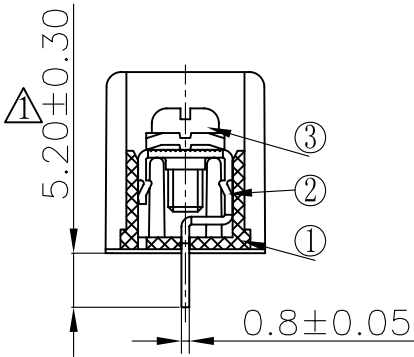
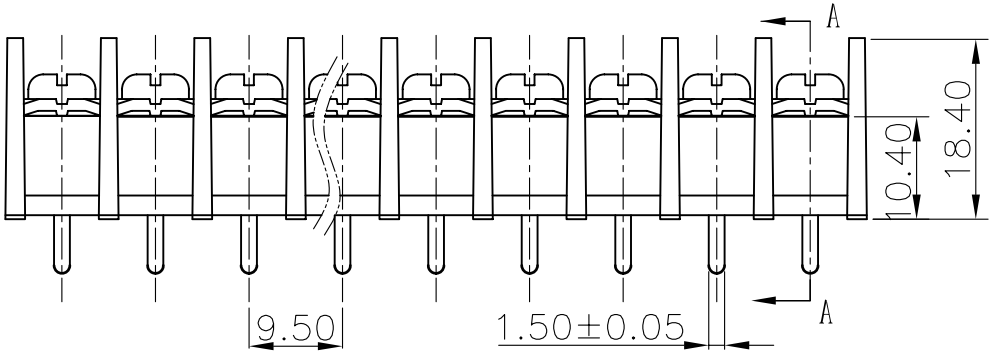


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		5.2±0.15⇒5.2±0.30	DZJ	09/20/05*
△		图面整理	CSX	06/10/06*

Notes:

- 1.Pitch:9.5mm , Poles:2-26P ;
- 2.Rated current:25A
- 3.Rated voltage:300V
- 4.Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/1Min
6. Insulation Resistance: 500MΩ /DC500V
- 7.Wire Range:22~12AWG
- 8.Max. Torque Value:12.24Kgf. cm.
- 9.Undimensioned Tolerances:


Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

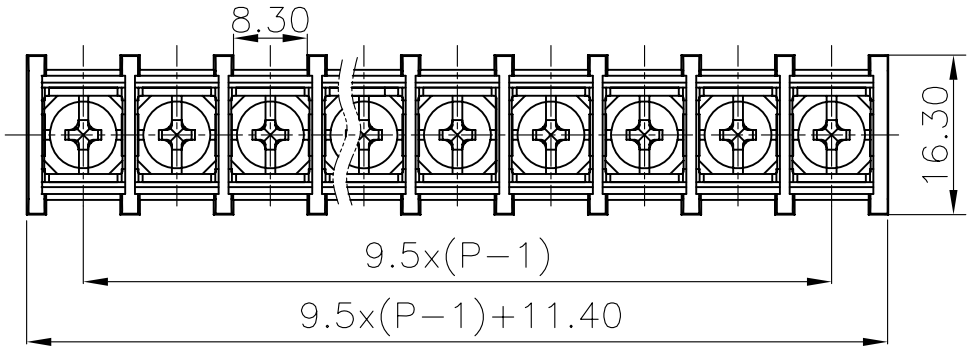

Section A-A



3	4*8 (7.5*7.5) bright Screws	S000000570 (H)	XX	Steel	Ni-Plated
2	DG45C-Pin header	5003B00010 (H)	XX	Brass	SnCe

1	DG45C-B-Housing(H)	5003A0YXXA(H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO DZJ	DATE 08/31/05*		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
	MM .0 ± ± .00 ± ± .000 ± ±					
	ANGLES ± 1°		G.E :			
			FINISH :		DRAWING NO. DG45C-E14	
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING		
			SHEET 1		OF 1	
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD						
NAME DG45C-B-XXP-1Y-00A(H)						
				SIZE A3	REV T2 06/10/06	