

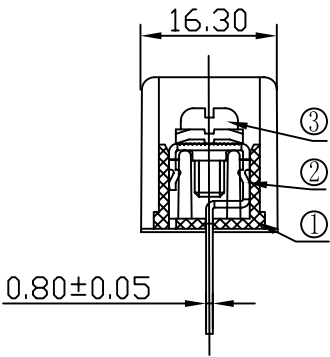
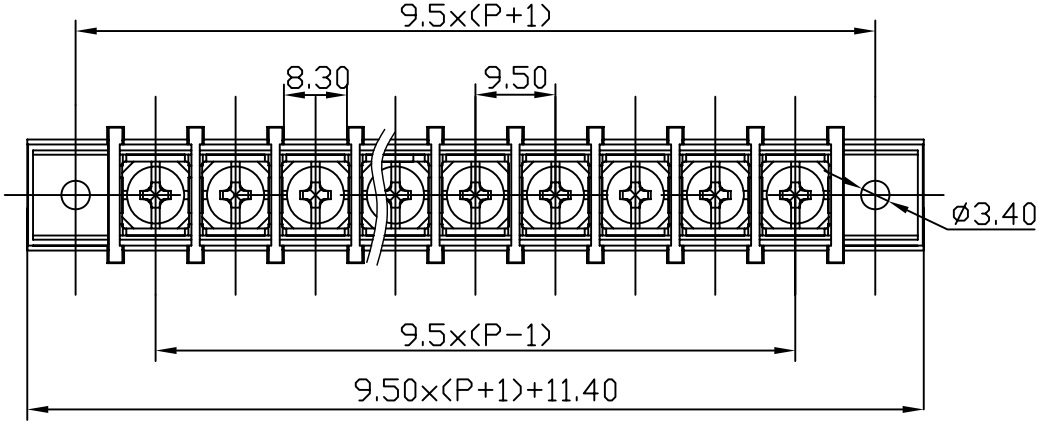


REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
1		出册尺寸由12.1±0.10mm变更为12.4±0.30mm	CSX	06/12/05	
2		增加UL刻字	CSX	07/05/06	
3		品名、料号增加环保标识“(0)”	Yej	12/08/07	




Section A-A

- Notes:
- 1.Pitch:9.5mm Poles:2-24P
 - 2.Rated current:25A
 - 3.Rated voltage:300V
 - 4.Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/1min
 - 6. Insulation Resistance:500MΩ/DC500V
 - 7. Wire Range:22~12AWG
 - 8. Max. Torque Value:12.24kgf.cm
 - 9.Undimensioned Tolerances:

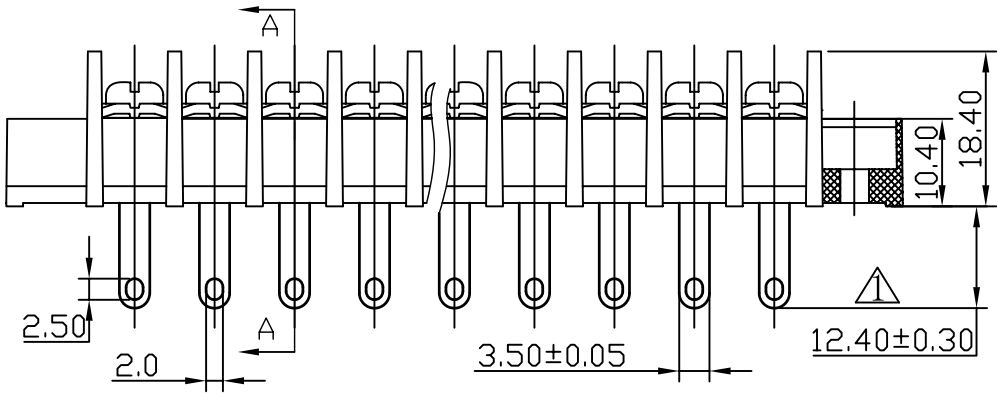

3	4*8 Bright Screws	S000000570 (H)	XX	Steel	Ni Plated
2	DG45H-Pin header	5003B00040 (H)	XX	Brass	SnCe

1	DG45H-A-00A-Housing	5003M0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTD JANNY	DATE 11/03/03"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFD	DATE		
			APPVL	DATE		
	MM .0 ± .00 ± .000 ± ± ± ±		NAME			
			DG45H-A-XXP-1Y-00A(H)			
			MATERIAL :			
	ANGLES ± 1°		G.E :			
	 THIRD ANGLE PROJECTION		FINISH:			
SCALE : 1:1						
DO NOT SCALE DRAWING						
		SHEET 1		OF 1		