

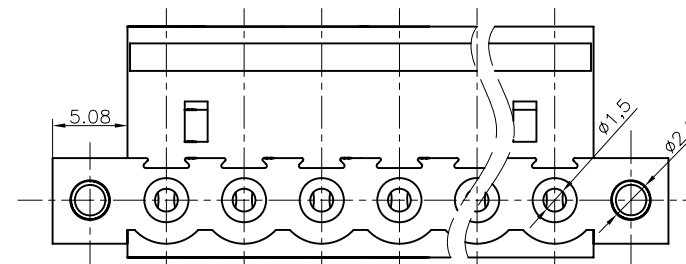
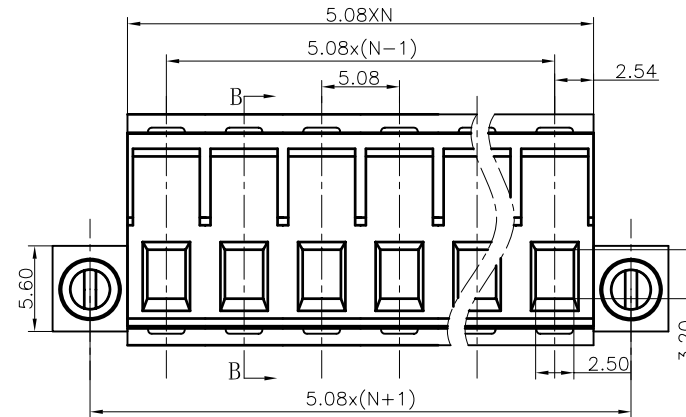


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		图面更新	CSX	04/17/06	
2		增加VDE、CE刻字	Ye j	02/25/08	
3		增加防脱卡点位置尺寸标注	WLM	02/06/09	


Drill hole
(Max $\varnothing 0.8 \times 1.2\text{mm}$)*2

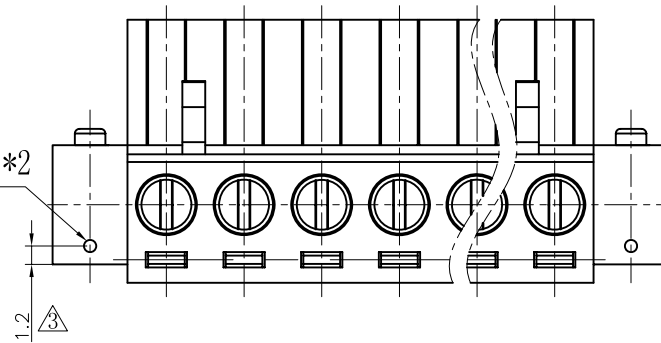

VIEW A

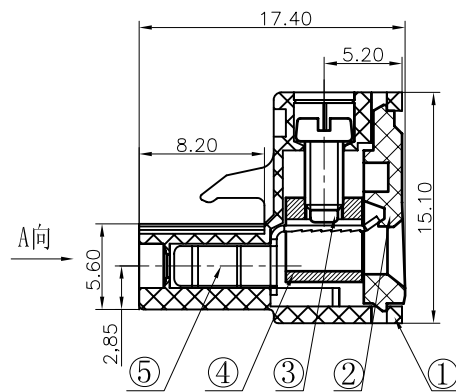


SECTION B-B



Notes:

- Pitch: 5.08mm, Poles: 2-24P
- Rated voltage/current: UL 300V/15A
VDE 320V/20A
- Operation temperatures: $-45^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: $5000\ \Omega / \text{DC}1000\text{V}$
- Wire Range: 28~12AWG, 2.5mm²
- Max. Torque Value: M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 30	60 to 60	100 to 100	150 to 150	150 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

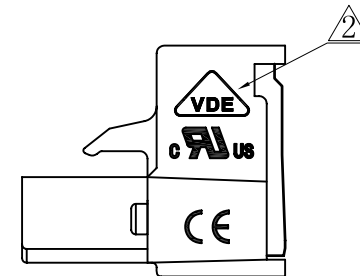

5	2EDG-Clamp	1005B00010 (H)	XX	Phosor Bronze	Ni plated
4	DG128 Brass cage	X000000020 (H)	XX	Brass	Ni plated
3	2EDG"-Screws-M2.5	S000001370 (H)	XX+2	Steel	Cr ³⁺ Zn
2	2EDGK-5.08-Cover	1005COYXXA (H)	1	PA66	UL94V-0

1	2EDGKM-5.08-Housing	1011A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO DZJ	DATE 10/15/05*	宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
MFO		DATE	DATE		
APPVL		DATE	DATE		
MATERIAL :		G.E :		NAME	
ANGLES ± 1°		FINISH :		2EDGKM-5.08-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		SCALE : 1:1		DRAWING NO. 2EDGKM-5.08-E04	
				/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	