
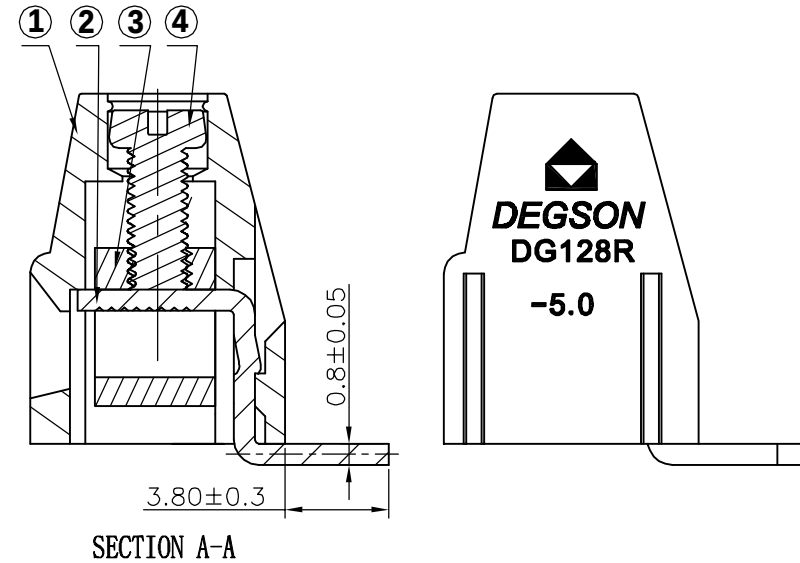



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		Drawing Revise	WF	07/07/07
2		增加VDE、CE标志	LJH	11/12/07
3		图面更新	LJH	04/09/08
4		增加CQC标志	Ye j	02/10/08
5	10-0046	UL电流由10A变更为15A	Lasting	08/06/10

Notes:

1. Pitch: 5.0mm, Poles: 2-XXP
2. Rated voltage/current: UL 300V/15A Δ
VDE 250V/18A
3. Operation temperatures: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000M Ω /DC1000V
6. Wire Range: 12~24AWG, 2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	$\sim$
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	$\square$

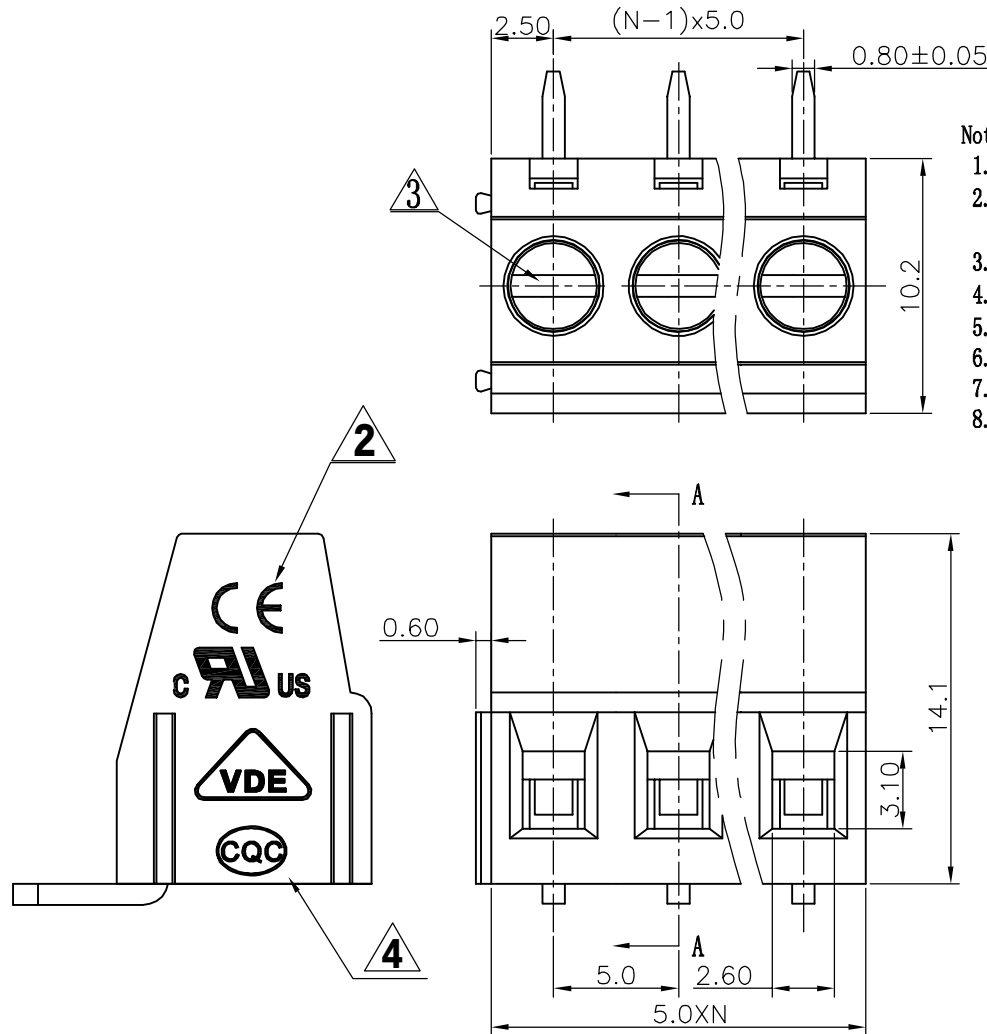

1	DG128-5.0-Housing	4096A0YXXA(H)	1	PA66	UL94V-0			
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES			
DETAILED LISTS	 MM (INCH)		DFTO Zhwm		DATE 04/03/06			
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE			
			MFO		DATE			
			APPLV		DATE			
	MM		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
	.0 ±						NAME	
	.00 ±						DG128R-5.0-XXP-1Y-00A(H)	
	.000 ±							
	ANGLES ± 1°		G.E :		DRAWING NO. DG128R-5.0-E04			
	 THIRD ANGLE PROJECTION		FINISH :		SIZE A3			
SCALE : 1:1			REV 15					
DO NOT SCALE DRAWING			/PART NO.					
		SHEET 1		OF 1				

4	128"-Screws	S000001460 (H)	XX	Steel	Cr ³⁺ Zn
3	128-Cage	X000000020 (H)	XX	Brass	Ni plated
2	128R-Pin header	4027B00030 (H)	XX	Brass	SnCe