


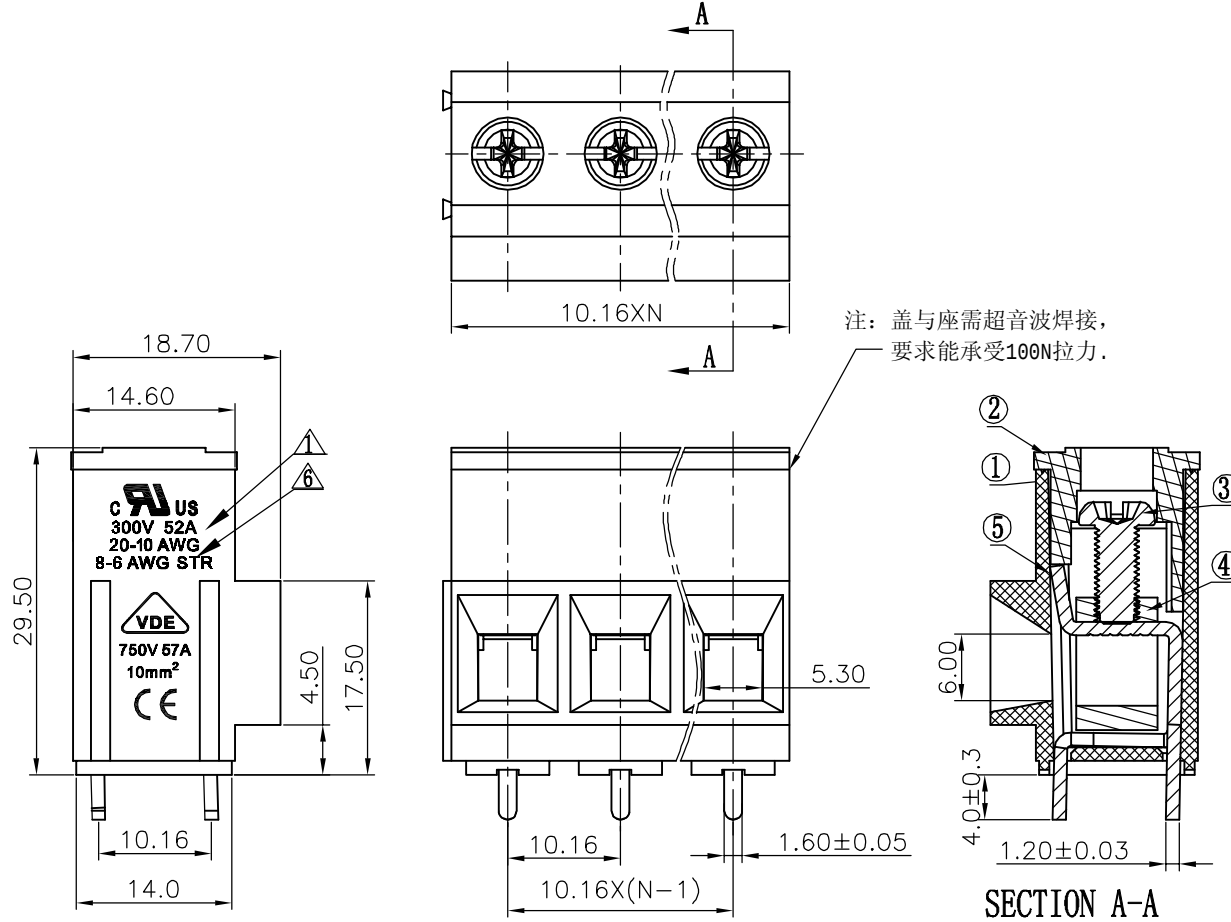

- Notes:
- 1. Pitch:10.16mm ,Poles:2-XXP
 - 2. Rated voltage/current:UL 300V/52A VDE 750V/57A
 - 3. Operation temperatures:-40℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ /DC1000V
 - 6. Wire Range:20~6AWG, 10mm²
 - 7. Max. Torque Value:M4, 12. 24kgf. cm
 - 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150					
to 6										
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

REVISION RECORD				
REV	ECO	DESCRIPTION	DRPT	DATE
1		增加UL刻字	CSX	10/06/06
2		焊脚由黄铜变更为紫铜	CSX	10/26/06
3		图面更新	YeJ	05/11/07
4		品名、料号增加环保标示“(H)”	CSX	12/10/07
5		图面更新	LJH	04/19/08
6		修改刻字	HD	10/20/08

5	DG135T- Pin header	4010B00020 (H)	XX	Pure copper	SnCe
4	DG135T- Cage	X000000920 (H)	XX	Brass	Ni Plated
3	DG135T- Screw	S000001520 (H)	XX	Steel	Cr ³⁺ Zn
2	DG135T-10.16-00A Cover	4010C0YXXA (H)	1	PBT	UL94V-0
1	DG135T-10.16-00A Housing	4010A0YXXA (H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG135T-10.16-XXP-1Y-00A (H) DRAWING NO. DG135T-10.16-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1					
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG135T-10.16-XXP-1Y-00A (H) DRAWING NO. DG135T-10.16-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1					