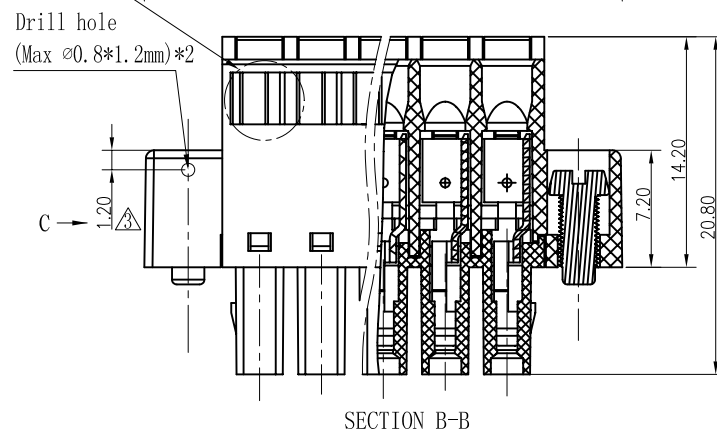
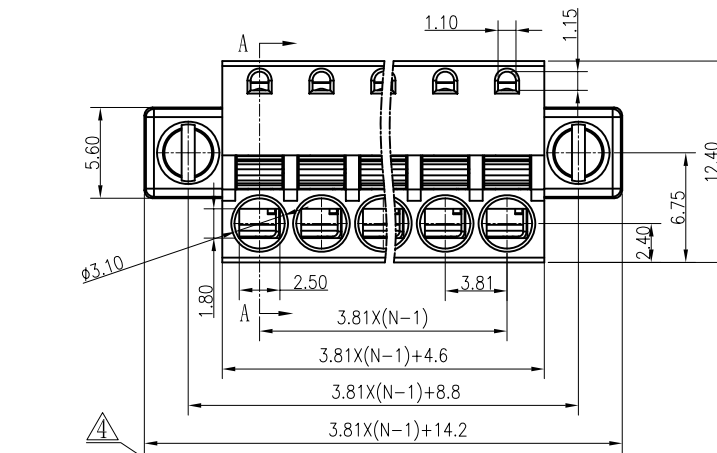
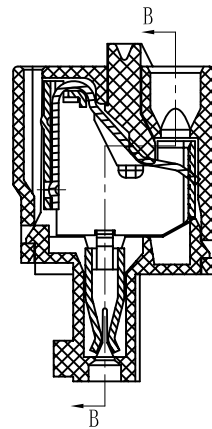
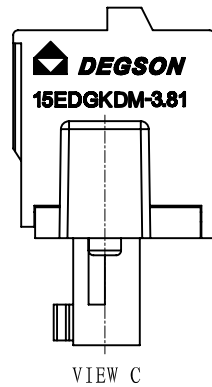


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		用治具打防脱点	AheadJu	10/08/07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		更换螺丝, 增加防脱点位置尺寸标注	WLM	02/06/09
△	10-0254	避专利改外形	HD	06/28/10
△	10-0358	增加VDE, UL刻字及修改参数	ZXX	10/21/10

Notes:

- Pitch: 3.81mm Poles: 2-20P
- Rated voltage/current: UL 300V/8A
VDE 250V/12A △
- Operation temperatures: -45℃ ~ +105℃
- Withstanding voltage: AC2000V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire range: 28-16AWG, 0.2-1.5mm² △
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	△
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	2EDG M2.5"—Screw	S000000980 (H) △	2	steel	Cr ³⁺ Zn
5	15EDGKD spring	X000001310 (H)	XX	stainless steel	
4	15EDGKD PIN	1088B00010 (H)	XX	phosphor bronze	Snce plated
3	15EDGKD BUTTON	1088D0501A (H)	XX	PA66	UL94V-0
2	15EDGKD-3.81-COVER	1088C0YXXA (H)	1	PA66	UL94V-0

1	15EDGKDM-3.81-HOUSING	1102A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ± ±	DFTO Zhurwm CHKD MFO APPLV MATERIAL : G.E : FINISH : SCALE :	DATE 05/31/07 DATE DATE DATE NAME 15EDGKDM-3.81-XXP-1Y-00A(H) DRAWING NO. 15EDGKDM-3.81-E01 /PART NO. DO NOT SCALE DRAWING	DEGSN ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD SIZE A3 REV T5 10/21/10* SHEET 1 OF 1	