

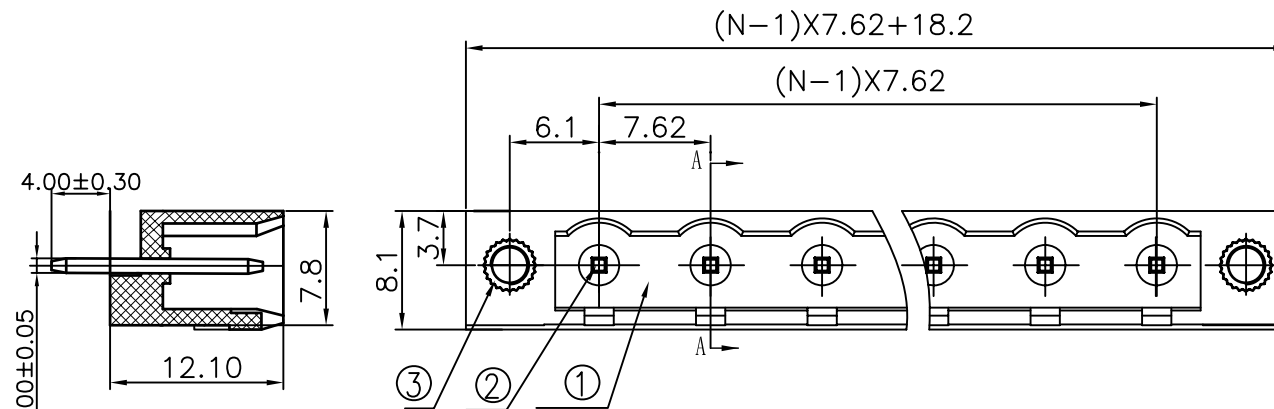


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加CE、VDE刻字	Ye j	02/29/08	



SECTION A-A

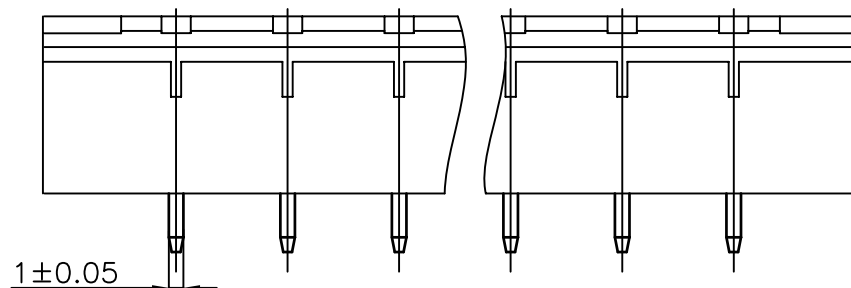

Notes:

1. pitch: 7.62mm poles:2-12p
2. Rated voltage/current:UL 300V/15A
VDE 400V/15A
3. Withstanding voltage: AC2000V/1Min
4. Insulation resistance:5000MΩ/DC1000V
5. Temp. Range: -40° C~+105° C
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	2EDGV (A) -Pin header (1*13.7)	1007B00030 (H)	XX	Brass	SnCe
2	2EDG-Screw cap	S000000040 (H)	2	Brass	

1	2EDGVM-7.62-Housing	1060A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Yangys	DATE 06/16/06*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
		MATERIAL :			
	ANGLES ± 1°	G.E :		NAME 2EDGVM-7.62-XXP-1Y-00A (H)	
	THIRD ANGLE PROJECTION	FINISH :		DRAWING NO. 2EDGVM-7.62-E01	SIZE A3
		SCALE :		/PART NO.	REV T1 02/29/08
DO NOT SCALE DRAWING				SHEET 1	OF 1