

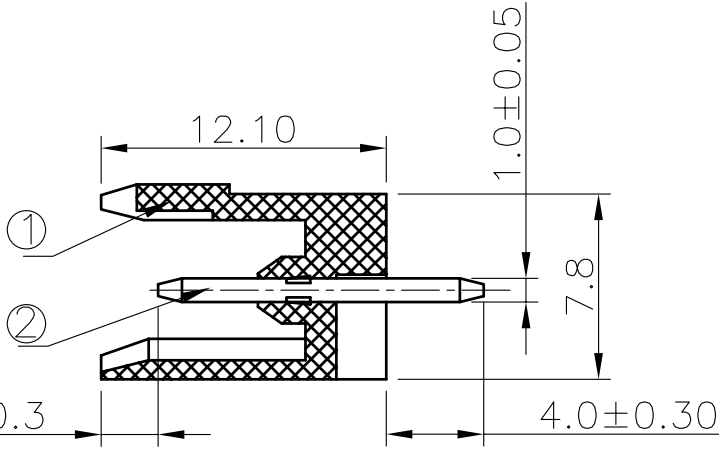


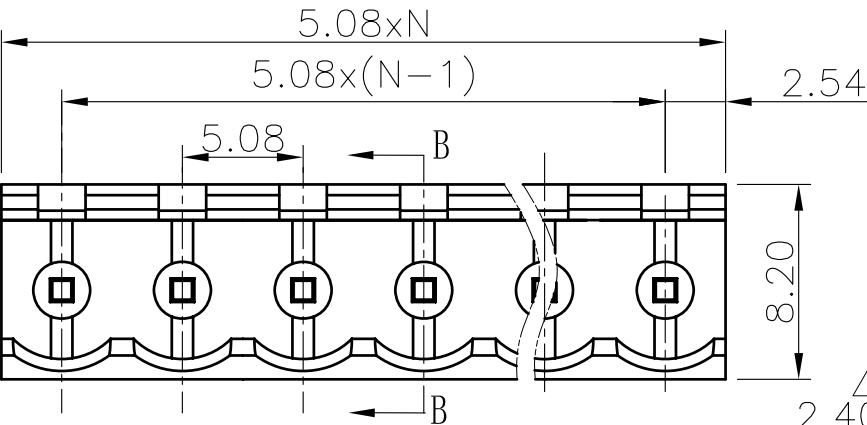

SECTION B-B

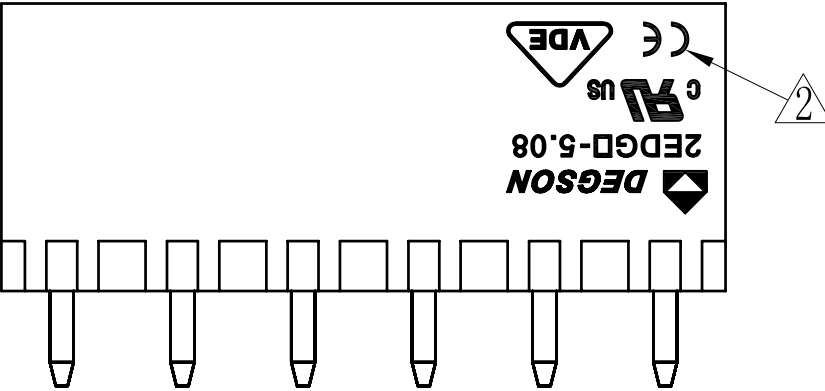

- Notes:
- 1. Pitch: 5.08mm, poles: 2-24p
 - 2. Rated voltage/current: UL 300V/15A
VDE 320V/20A
 - 3. Operation temperatures: -40° C ~ +105° C
 - 4. Withstanding voltage: AC2000V/1min
 - 5. Insulation resistance: 5000MΩ/DC1000V
 - 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing emend	CSX	04/04/06
2		增加VDE、CE刻字	Yej	02/28/08
3		增加自动化方针	WLM	09/23/08
4	10-0329	增加标注尺寸	COCO	10/07/10

2	2EDGV-Pin header	1007B00010 (H)	XX	Brass	Automatic assembly
2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	Manual assembly
1	2EDGV-5.08-Housing	1008A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETAILED LISTS		DFTO DZJ	DATE 09/21/05*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
MM		MATERIAL :		NAME	
.0 ±				2EDGV-5.08-XXP-1Y-00A(H)	
.00 ±		G.E :		DRAWING NO. 2EDGV-5.08-E06	
.000 ±		FINISH :		/PART NO.	
ANGLES ± 1°		SCALE : 1:1		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION				SHEET 1 OF 1	