
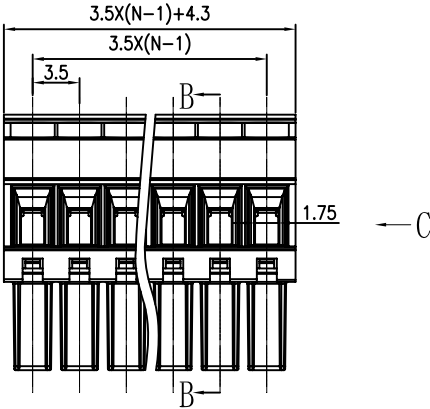



Notes:

1. Pitch: 3.5mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~16AWG, 0.5-1.5mm²
7. Max. Torque Value: M2, 2.04kgf.cm (1.77Lb. in)
8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

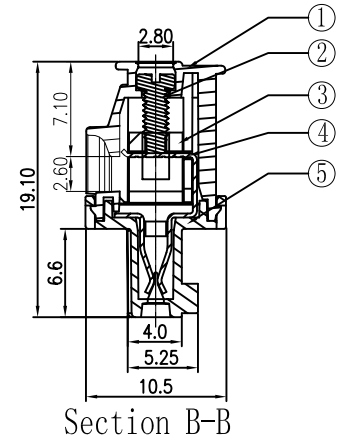

C向

5	15EDGKA/B-3.5-100A-Cover	1033C0YXXE (H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/B-3.5-100A-Housing	1033A0YXXE (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Apply	DATE 04/11/09*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM .0 ±	MFO	DATE	NAME 15EDGKB-3.5-XXP-1Y-100A (H)	
	.00 ±	APPVL	DATE		
	.000 ±	MATERIAL :		DRAWING NO. 15EDGKB-3.5-E100	
ANGLES ± 1°		G.E :		/PART NO.	
THIRD ANGLE PROJECTION		FINISH :		SIZE A3	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	