


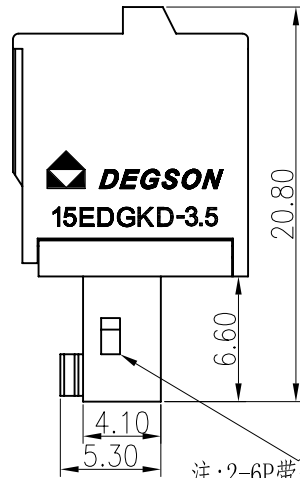


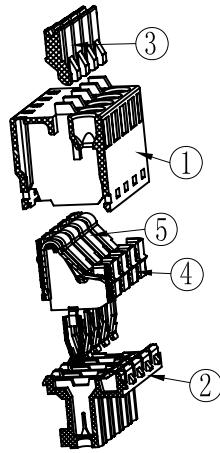


注:2-6P带卡点,7-24P,不带卡点

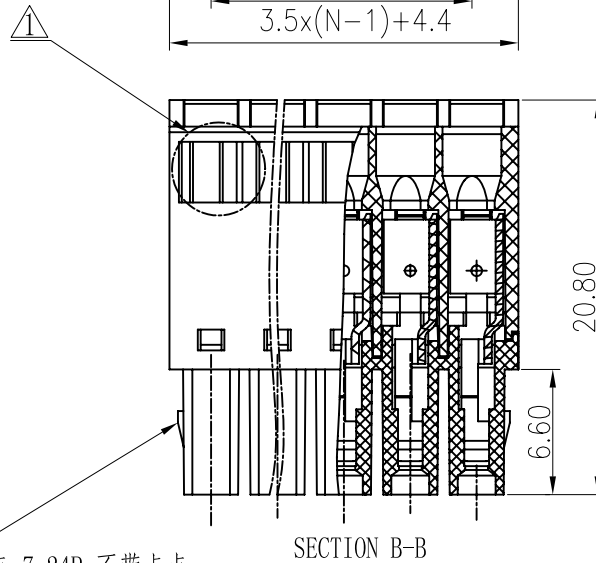

SECTION B-B

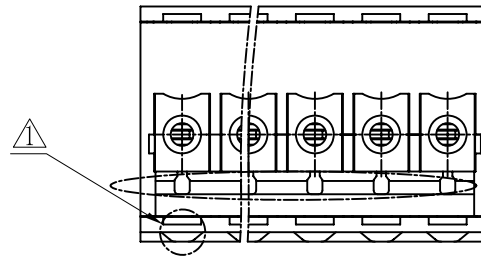

SECTION A-A

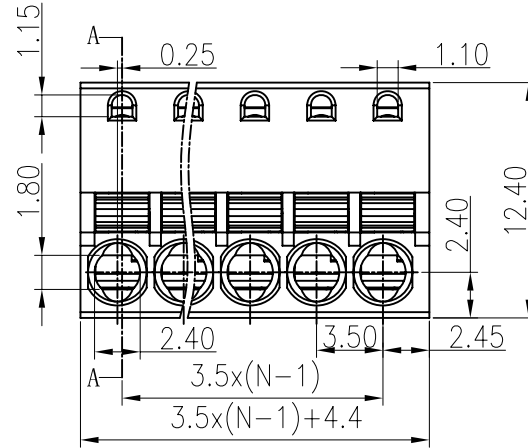


Notes:

1. pitch:3.5mm poles:2-24p
2. Rated voltage/current:UL 300V/8A
VDE 250V/12A
3. Insulation Resistance:5000MΩ/DC1000V
4. Withstanding voltage: AC2000V/1Min
5. Wire range:28-16AWG 0.2-1.5mm²
6. Temp. Range:-40° C~+105° C
7. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
10-0260		避专利改外形	HD	06/28/10
10-0342		增加VDE刻字	Yi. Zeng	10/08/10

Pitch range in mm		Nominal dimension range in mm							—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

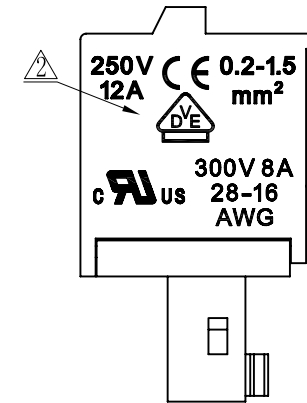

5	15EDGKD Spring	X000001310(H)	XX	Stainless steel	
4	15EDGKD Clamp	1088B00010(H)	XX	Phosphor bronze	Snce plated
3	15EDGKD Button	1088D0501A(H)	XX	PA66	UL94V-0
2	15EDGKD-3.5-Cover	1087C0YXXA(H)	1	PA66	UL94V-0

1	15EDGKD-3.5-Housing	1087A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON 15EDGKD-3.5-XXP-1Y-00A(H)					
DRAWING NO. 15EDGKD-3.5-E01			SIZE A3		
/PART NO.			REV T2		
DO NOT SCALE DRAWING			SHEET 1 OF 1		