

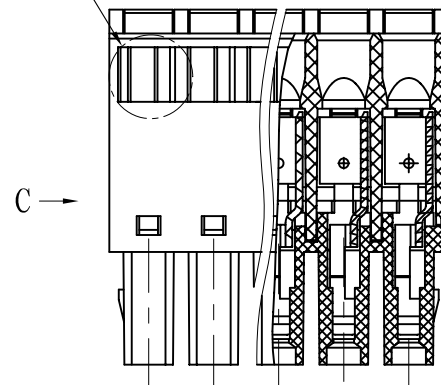
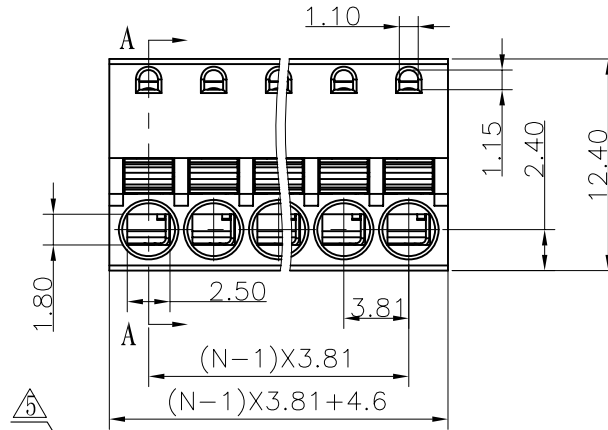



SECTION A-A

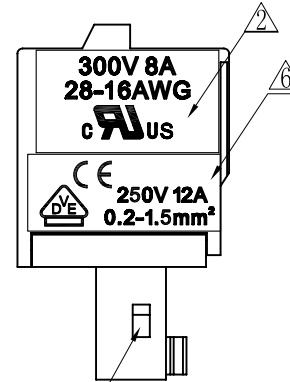

SECTION B-B

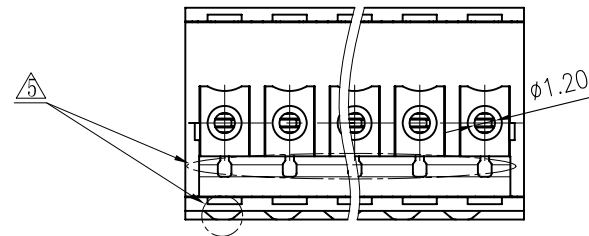

注:2-6P带卡点,7-24P,不带卡点

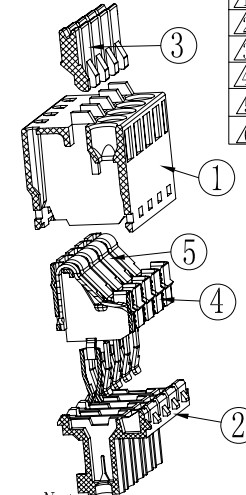

Notes:

- pitch:3.81mm poles:2-24p
- Rated voltage/current:UL 300V/8A
VDE 250V/12A
- Insulation Resistance:5000MΩ/DC1000V
- Withstanding voltage: AC2000V/1min
- Wire range:28-16AWG 0.2-1.5mm²
- Temp. Range:-40° C~+105° C
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over	over	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	150	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±1.0	0.05/10

5	15EDGKD spring	X000001310(H)	XX	stainless steel	
4	15EDGKD PIN	1088B00010(H)	XX	phosphor bronze	Since plated
3	15EDGKD BUTTON	1088D0501A(H)	XX	PA66	UL94V-0
2	15EDGKD-3.81-COVER	1088C0YXXA(H)	1	PA66	UL94V-0

1		15EDGKD-3.81-HOUSING		1088A0YXXA (H)		1		PA66		UL94V-0				
ITEM		NAME OF PART		NO. OF PART		Q'TY		MATERIAL		NOTES				
DETAILED LISTS	MM (INCH)		DFTO Zhuwm		DATE 05/31/'07		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD							
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE									
			MFO		DATE									
			APPLV		DATE									
	MM				MATERIAL :		NAME 15EDGKD-3.81-XXP-1Y-00A(H)							
	.0 ±		±											
	.00 ±		±											
	.000 ±		±											
	ANGLES ± 1°		G.E :		DRAWING NO. 15EDGKD-3.81-E01					SIZE		REV		
			FINISH :							/PART NO.		A3		T6
		THIRD ANGLE PROJECTION		SCALE :		DO NOT SCALE DRAWING					SHEET 1		OF 1	